

HARMAN®

BUILT TO A STANDARD, NOT A PRICE

ACCENTRA 52i

PELLET INSERT



BUILT TO A STANDARD NOT A PRICE

Sealed hopper holds up to 64.5 lbs.

Dual 134 CFM blowers for quieter operation

Flame-reactive mirrored glass

Control panel behind hinged left door



Large hopper opening for easy loading



Optional ceramic log set

Large, clean viewing area

Cover/Above: Accentra52i shown in optional porcelain majolica brown and ceramic log set

Nautical medallion



ACCENTRA52i PELLET INSERT

The Best Just Got Better. The Accentra52i is the latest, upgraded edition of the best-selling Accentra insert. PelletPro™ technology and high efficiency provide powerful, even heat within 1 degree and maximum output from any grade of pellet. This saves on costs and easily heats a larger space. A reengineered design provides even easier operation and maintenance—for up to 50% less cleaning time than any other pellet appliance available.

Upgrade any existing fireplace opening. Even heat, easy maintenance and distinctive features make the Accentra52i a premium heating solution that is “built to a standard, not a price.”



EXCLUSIVE TECHNOLOGIES

PelletPro™ System

The patented PelletPro system makes it possible to burn any grade of pellet fuel with maximum heat and efficiency. A bottom-up feeding system burns each pellet completely and allows for 24-hour heating. To learn more about the PelletPro System, visit HarmanStoves.com.

Accentra52i shown in porcelain majolica brown

ESP Temperature Control

Harman pellet inserts utilize an advanced exhaust sensing probe (ESP) system to deliver precision heating control. ESP constantly monitors and adjusts heat output to maintain set room temperatures within 1 degree. To learn more about ESP Temperature Control, visit HarmanStoves.com.

Accentra52i shown in black with ceramic log set

FEATURES & OPTIONS


Distinctive features offer convenience, safety and style. Just fill the hopper, set the desired temperature, and relax.

Features

- Automatic ignition and temperature control
- Exclusive door air wash system
- Dual 134 CFM blowers
- Flame-reactive mirrored glass
- Concealed ash pan

Options

- Choice of black or porcelain majolica brown
- Ceramic log set
- Outside air kit
- 3" vent pipe
- Zero-clearance housing
- Harman Service Rail Kit



ESP Temperature Control helps maintain a consistent room temperature, saving you fuel and money.



An optional service rail kit makes it easy to install and perform maintenance.

PERFORMANCE


SPECIFICATIONS

ACCENTRA 52i PELLET INSERT	BTU/hr Input ¹	Feed Rate	Heating Capacity ²	Efficiency ³	Emissions	Blower Size	Fuel	Hopper Capacity	Weight	Width	Height	Depth	Venting Size
	13,800- 53,000	1.5 lb/hr min 5.8 lbs/hr max	900 - 2,600 sq ft	81.7%	1.5 g/hr	(2) 134 CFM	Wood pellets	20" fireplace opening: 47.5lb 22" fireplace opening: 58lb 24" fireplace opening: 64.5lb	450 lbs. with surround	41-13/16"	32-1/8"	29-15/16"	4" PL pellet vent pipe standard, 3" PL pellet vent pipe option


Dimensions




Front View

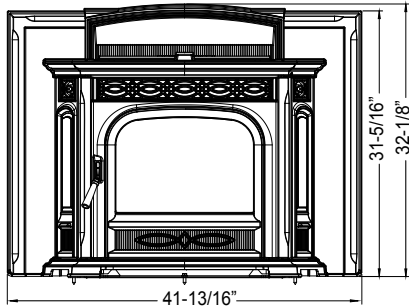


Side View

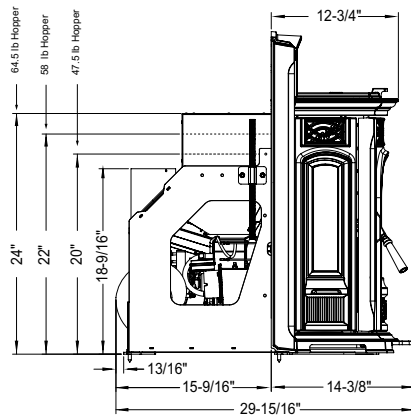

Top View

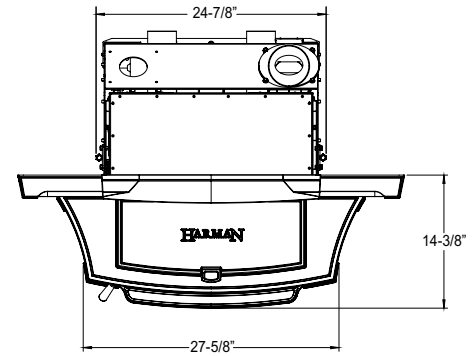

Zero Clearance Side View




When using 3" or 4" PL vent pipe, there must be 3" clearance to combustibles.

Clearances to Combustibles

A	B	C	D	E
Unit to Sidewall	Unit top to mantel	Cast surround to 3/4" trim	Cast surround to 3/4" trim	Floor Protector: Spark and Ember Protection only, no required R value
12"	12"	0"	6"	6" (from glass)

Floor protection: Minimum 16-1/2" deep by 30" wide.

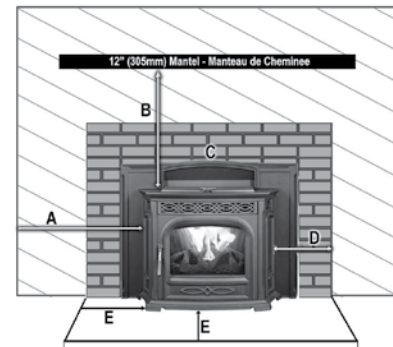

YOUR HARMAN DEALER IS:

HARMAN
BUILT TO A STANDARD, NOT A PRICE

PHONE: 800-664-3119

WWW.HARMANSTOVES.COM

facebook.com/HarmanStoves

twitter.com/HarmanStoves

youtube.com/HarmanStoves

LIMITED LIFETIME WARRANTY⁴

The strongest in the industry, Harman provides a limited lifetime warranty on most important aspects: firebox and heat exchanger.

¹ EPA tested input. ² See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. ³ Weighted Average LHV (Low Heating Value) Efficiency. ⁴ For full warranty details, visit www.harmanstoves.com

Actual product appearance, including flame, may differ from image. Tested to: ULC-S628-93 and ASTM E1509-12. Product specifications and pricing subject to change without notice. The images and descriptions in this brochure are provided to assist you in product selection only. Fuel density and pellet shape may affect hopper capacity. BTUs may vary depending on type of fuel used. Refer to installation manual for complete clearance requirements and specifications.

Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.harmanstoves.com/fireplacesafety

HAR-1112U-0815