



Classic Series

DIRECT VENT GAS
FIREPLACES



*Dassel w/Mission
design full door face*

Dassel Specifications	2	Trimont Specifications	10
Princeton Specifications	4	Fireplace Options & Accessories	12
Thief River Falls Specifications	6	Two Harbors	13
Minnetonka Specifications	8	Two Harbors Options & Accessories	16

MODELS

**DASSEL • PRINCETON
THIEF RIVER FALLS • MINNETONKA
TRIMONT • TWO HARBORS**

Dassel Slim Profile Direct Vent Specifications

Dassel w/Rectangular Prairie pattern full door face - Aspen flush surround - Absolute Black Granite



Model	Fuel Opt.	High	Low	Max. Efficiency
DSL36	NG	26,000	13,000	80%
	LP	25,500	12,000	81%

Features

- Canada P-4 approved
- AFUE rated
- High quality lifetime warranty glass (23 3/4" x 30 1/6")
- High-low regulator
- Speed control with receptacle assembly
- Patented log design
- Model DSL-36-IP1 only (electronic ignition) - remote modulating valve system w/ flame, fan adjustment & fan kit
- Upper grill/hood & lower grill (black)
- Engineer-designed burner system
- Minnesota Energy Code compliant to 50 pascals

Safety

- Each unit factory tested!
- Tested by OMNI-Test Laboratories Complies with ANSI-Z21.88a -2007•CSA 2.33a-2007 'vented gas fireplace heaters'
- U.S. & Canadian installation approved
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second safety pilot
- Automatic pressure relief glass system
- Bedroom & mobile home approved

Venting Requirements

This stove is manufactured standard to accept 5" x 8" pipe. Dura-Vent's 4"x 6 5/8" Decreaser can be used on this stove, but only with Dura-Vent pipe.

- Simpson Dura-Vent™ DV-GS pipe - 5" x 8" & 4" x 6 5/8"
- Selkirk Metalbestos™ direct chimney system - 5" x 8" ONLY
- Ameri-Vent™ direct chimney system - 5" x 8" ONLY
- Metal Fab™ - 5" x 8" ONLY
- ICC™ - 5" x 8" ONLY
- Security™ - 5" x 8" ONLY
- Kozy Heat flexible #800 series vent kits* - 5" x 8" ONLY

Please consult the installation manual for a list of approved caps.


IMPORTANT: Kozy Heat Part #800-WPT or #800-WPT2, must be used on horizontal vent runs using 5" x 8" pipe.

Specifications	
Height	32"
Width	35 7/8"
Back width	27 7/8"
Depth	15 1/4"
Weight	150 lbs.


Framing Dimensions	
Height	37 1/2"
Width	36 3/8"
Depth	15 3/4"

Clearances	
Fireplace front edges to framing	1/4"
Fireplace top to framing	5 1/2"
Fireplace back & back corners	1/4"
Fireplace bottom to flooring	0"
Fireplace top to ceiling	31"
Fireplace face to adjacent sidewall	3"
Fireplace front	36"
Mantel 4" deep from top of fireplace	16"
Refer to the mantel requirements in the installation manual	


TOP




FRONT



LEFT



RIGHT





Dassel w/full screen face

The Dassel...

is the perfect fit for smaller sized rooms or when installation space is a concern. At 15-1/4" deep the *Dassel* can be installed easily, but still offers efficiency, heat, and a great looking fire. Give your room a customized design with numerous door or screen options.

Princeton Specifications



Princeton w/Arched Prairie
pattern full door face

Model	Fuel Opt.	High	Low	Max. Efficiency
PRC36	NG	35,000	22,500	80%
	LP	34,800	25,500	81%

Features

- Canada P-4 approved
- AFUE rated
- High quality lifetime warranty glass (23 3/4" x 30 1/16")
- Quick-latch glass/Pressure release system
- Accepts rigid DV vent systems or Kozy Heat #800 series flexible termination kits
- Engineer-designed burner system w/external adjustable venturi
- Model PRC-36-IPI only (electronic ignition) - remote modulating valve system w/ flame, fan adjustment & fan kit
- Patented log design
- Brick refractory
- Heat damper control
- Upper grill/hood & lower grill (black)
- Minnesota Energy Code compliant to 50 pascals

Specifications	
Height	32"
Width	35 7/8"
Back width	24 5/8"
Depth	21 3/8"
Weight	160 lbs.


Safety

- Each unit factory tested!
- Tested by OMNI-Test Laboratories
- Complies with ANSI Z21.88a-2007 • CSA 2.33a-2007
'Vented Gas Fireplace Heaters'
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second safety pilot
- Automatic pressure relief glass system
- Bedroom and mobile home approved


Framing Dimensions	
Height	42"
Width	36 3/8"
Depth	21 7/8" horz. termination
	23 7/8" vert. termination

Clearances	
Top of unit face to framing	10"
From unit left & right sides & back	1/2"
Surround sides (flush)	1/4"
To flooring	0"
Unit top to ceiling	31"
Unit's side to adjacent sidewall	10"
Fireplace front	36"
Mantel 10" deep from top of unit	15"
Refer to the mantel projection chart in the installation manual	


TOP




FRONT




LEFT



RIGHT



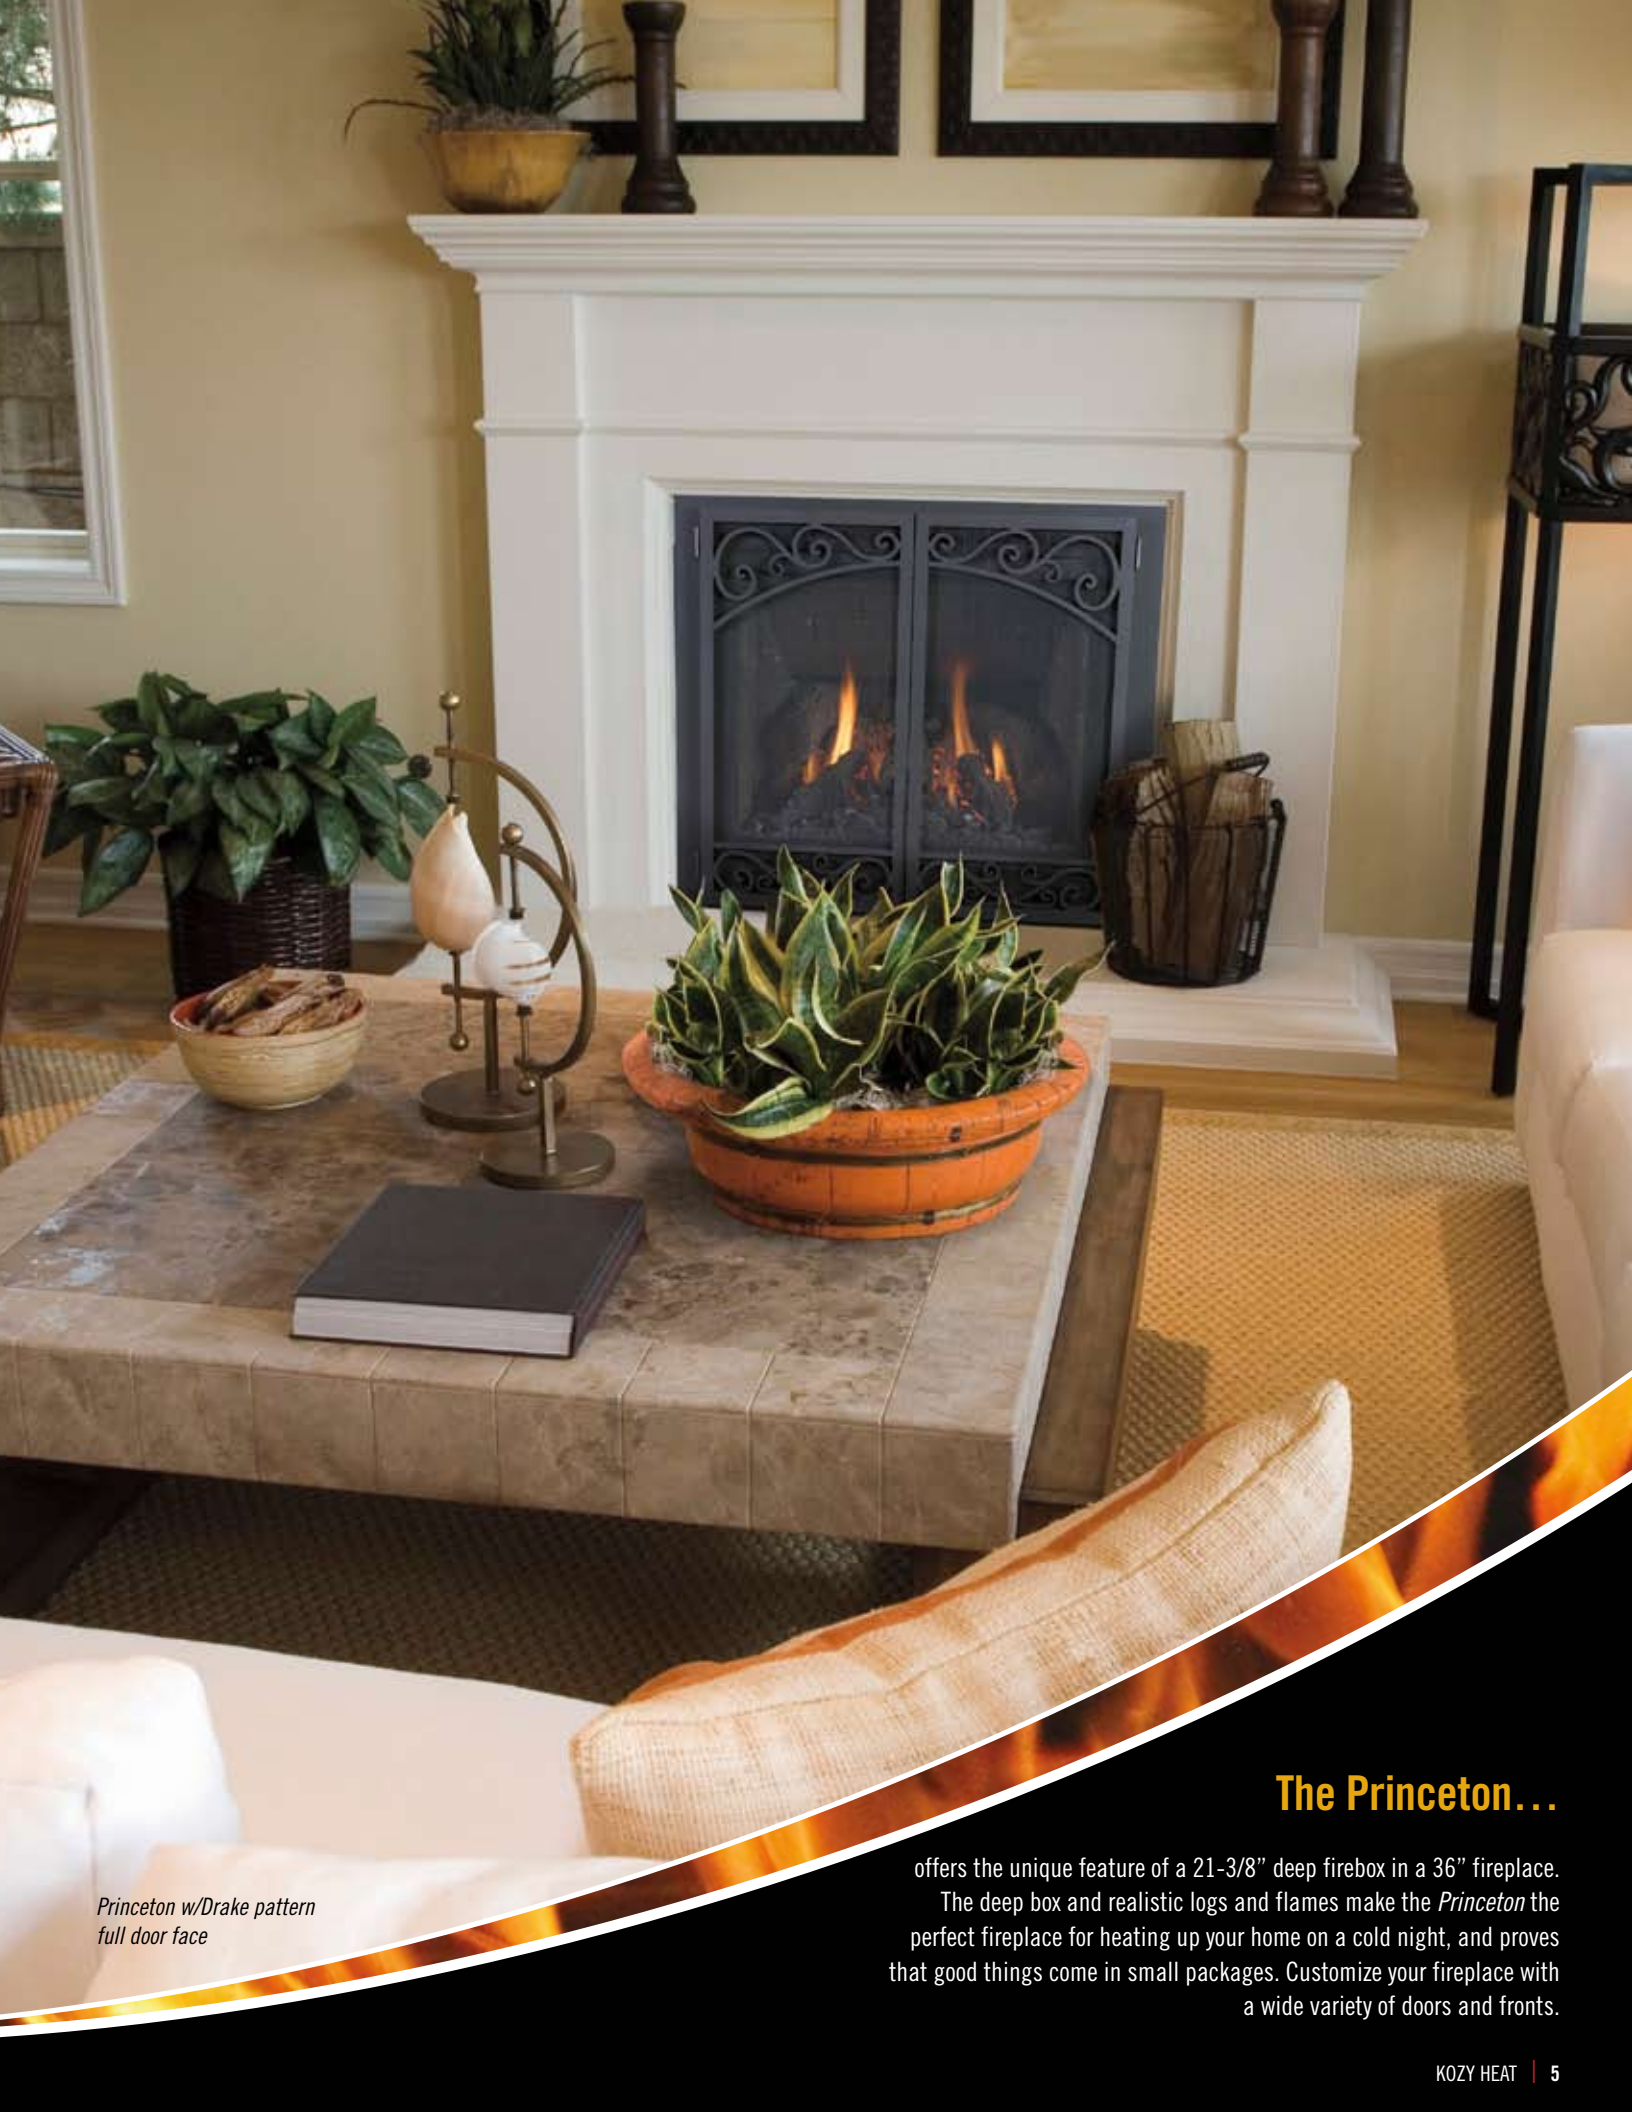

*Princeton w/Drake pattern
full door face*

The Princeton...

offers the unique feature of a 21-3/8" deep firebox in a 36" fireplace. The deep box and realistic logs and flames make the *Princeton* the perfect fireplace for heating up your home on a cold night, and proves that good things come in small packages. Customize your fireplace with a wide variety of doors and fronts.

Thief River Falls Top/Rear Vent Gas Specifications



Thief River Falls w/Mission
design doors

Model	Fuel Opt.	High	Low	Max. Efficiency
56701	NG	28,000	20,000	80%
	LP	28,000	21,000	82%

Features

- Canada P-4 approved
- AFUE rated
- High quality lifetime warranty glass (35" x 26")
- Quick-latch glass
- Accepts rigid pipe; rear vent ready
- Model TRF-IP1 only (electric ignition), remote modulating valve system w/flame, fan adjustment & fan kit
- Upper grill/hood and lower grill (black)
- High-low regulator
- Patented log design
- Minnesota Energy Code compliant to 50 pascals


Specifications	
Height	34 1/2"
Width	40 3/4"
Back width	22 1/2"
Depth	15 3/4"
Weight	180 lbs.

Safety

- Each unit factory tested!
- Tested by OMNI-Test Laboratories
- Complies with ANSI Z21.88a-2007•CSA 2.33a-2007 'Vented gas fireplace heaters'
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second delay pilot
- Automatic pressure relief glass system
- Bedroom and mobile home approved

Framing Dimensions	
Height	38 1/4"
Width	41 1/4"
Depth	16 1/4"
Platform	40 3/4" W x 15 3/4" D

Clearances	
Top of unit face to framing	3 1/2"
From unit left & right sides & back	1/2"
Surround sides (flush)	0"
To flooring	0"
Unit top to ceiling	31"
Unit side to adjacent sidewall	0"
Mantel 8" deep from top of fireplace	8"
Mantel 12" deep from top of unit	12"
Refer to the mantel projection chart in the installation manual	

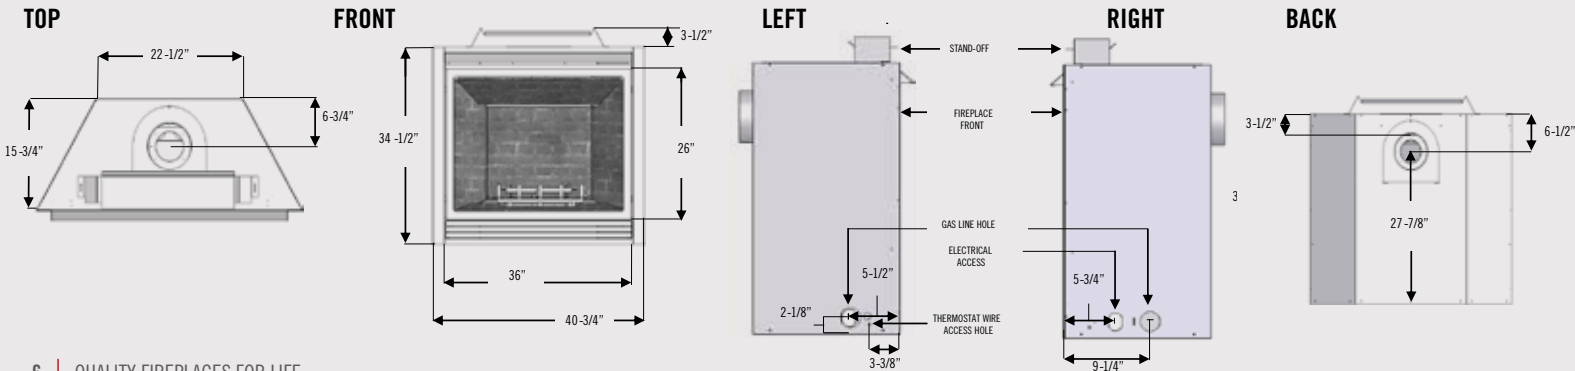



*Thief River Falls w/Arched Drake
pattern full door face*

The Thief River Falls...

The *TRF* offers value, heat, and a slim-profile that is the best in its class. The *TRF* has the ability to be vented off the top or back allowing it to be installed in almost any situation. The large viewing area and realistic logs and burner make the *TRF* a perfect fireplace when space is a concern. Numerous door and face options allow the *TRF* to be customized for your décor.

Minnetonka Specifications



Minnetonka w/full screen face

Model	Fuel Opt.	High	Low	Max. Efficiency
55345	NG	40,000	21,500	80%
	LP	40,000	26,500	81%

Features

- Canada P-4 approved
- AFUE rated
- High quality lifetime warranty glass (35" x 26")
- Quick-latch glass
- Accepts rigid pipe or Kozy Heat flexible vent system, no adaptor necessary
- High-low regulator
- Patented log design
- Brick refractory
- Heat damper control
- Upper grill/hood & lower grill (black)
- Model 55345 - IPI only (electronic ignition) - remote modulating valve system w/ flame, fan adjustment & fan kit
- Minnesota Energy Code compliant to 50 pascals


Specifications	
Height	34 1/2"
Width	40 7/8"
Back width	29 1/4"
Depth	21 3/8"
Weight	195 lbs.

Safety

- Each unit factory tested!
- Tested by OMNI-Test Laboratories
Complies with ANSI Z21.88b-2008•CSA 2.33b-2008 'Vented gas fireplace heaters'
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second delay pilot
- Automatic pressure relief glass system
- Bedroom and mobile home approved

Framing Dimensions	
Height	44 1/2"
Width	41 3/8"
Depth	21 7/8" horz. terminations 23 7/8" vert. terminations
Platform	40 7/8" W x 21 3/8" D

Clearances	
Top of unit face to framing	10"
From unit left & right sides & back	1/2"
Surround sides (flush)	1/4"
To flooring	0"
Fireplace top to ceiling	31"
Unit's side to adjacent sidewall	12"
Mantel 10" deep from top of fireplace	15"
Refer to the mantel projection chart in the installation manual	

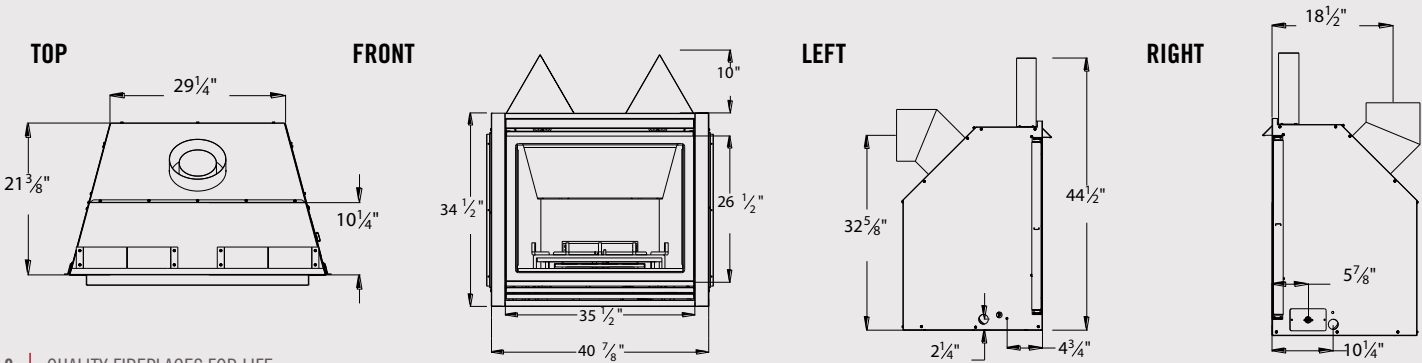



Minnetonka w/Mission design doors

The Minnetonka...

fireplace is known throughout the hearth industry for arguably the most realistic flame and log technology available. Not only does the *Minnetonka* offer ambiance and design to your room but the technology, decorative fronts, doors, and finishes offer unsurpassed value in the market. The *Minnetonka* is sure to be the focal point of your home.

Trimont See-Thru Direct Vent Specifications



Trimont w/Mission design full door face

Model	Fuel Opt.	High	Low	Max. Efficiency
TMT3875	NG	47,000	23,500	72.40%
	LP	46,000	26,500	77.22%

Features

- Canada P-4 Approved
- AFUE rated
- Model TMT-3875 IPI only (electronic ignition) - remote modulating valve system with flame, fan adjustment & fan kit
- High quality lifetime warranty glass (2) 34 3/4" x 26"
- High-low regulator - model TMT-3875 only
- Speed control with receptacle assembly - model TMT-3875 only
- Patented log design
- Brick refractory (ends & bottom)
- Seasonal heat damper
- Minnesota energy code compliant to 50 pascals
- **This model can be converted to a 3-sided pier with the installation of an optional pier conversion kit**

Safety

- **Each unit factory tested!**
- Tested by OMNI-Test Laboratories complies with ANSI Z21.88a-2007 • CSA 2.33a-2007 'Vented Gas Fireplace Heaters'
- TU.S. & Canadian Installation Approved
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second safety pilot
- Automatic pressure relief glass system
- Bedroom & mobile home approved

Venting Requirements

Rigid 5" x 8" Dura-Vent®, AmeriVent®, Selkirk Metalbestos®, Metal-Fab and the Kozy Heat #800 series flexible vent systems are approved for this fireplace

IMPORTANT: Kozy Heat part #800-WPT, must be used on All horizontal vent runs

Horizontal Terminations:

- Minimum: NG - 90° elbow + 6" + termination cap
LP - 6" + 90° elbow + 6" + termination cap
- Maximum: NG - 90° elbow + max. 10' run
LP - 6" + 90° elbow + max. 10' run

Vertical Terminations:

- Minimum: 4' = AmeriVent®, Selkirk Metalbestos® and Metal-Fab
- Minimum: 8' = Dura-Vent®
- Maximum: 35'

Note: A restrictor is required for all vertical venting applications

Horizontal & vertical combo: 30' = 10' max. horizontal
20' max. vertical





Specifications	
Height	34 1/2"
Width	38 3/4"
Depth	24"
Weight	220 lbs.

Framing Dimensions		
	See-Thru	Pier
Height	46"	46"
Width	42 1/4"	40 1/2"
Finished Wall Depth	24"	

Clearances	
From face top	11 1/2"
From vented/non-vented ends	1 3/4"
Side of fireplace to adjacent side wall	1 3/4"
Full door face sides (decorative option)	1/4"
To flooring	0"
Unit floor to ceiling	68"
Mantel 12" deep from top of unit*	12"
Refer to the mantel requirements in the installation manual	

Pier model

See-Thru

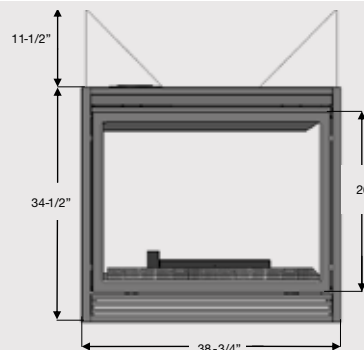

*Trimont w/full screen face
& Mission pier end*



The Trimont...

Whether you are joining a bedroom and a bathroom, or looking for the architectural element that a pier fireplace adds to any room – the *Trimont* offers all of this and more. The *Trimont* is a multi-sided fireplace that can be installed as a see-thru fireplace or in a three-sided pier application. Add decorative fronts or operable doors to one side or both – your choices are endless.

Fireplace Options & Accessories

Finishes



Antique Copper



Brushed Nickel



Rust



Titanium

Optional Features	DSL	PRC	TRF	MTK	TMT
Flex vent adaptor kit			X		
Per conversion kits (standard & Mission design)					X
Backlight kit		X		X	
Full door faces/Mission doors (TMT See-Thru only)	X	X	X	X	X
Full screen face	X	X	X	X	X
Automatic fan kit w/var. sp. Ctl. (Non-IPI Models 1-75 CFM)	X				X
Automatic fan kit w/var. sp. Ctl. (Non-IPI Models 2-75 CFM)		X	X	X	
Remote control/thermostat remote (Non-IPI Models)	X	X	X	X	X
Wall mount thermostat/wireless wall mount (Non-IPI Models)	X	X	X	X	X
Brick refractory	X		X		
Enamel panels	X	X	X	X	
Wall, corner cabinet & flush surround (Refer to the cabinetry brochure)	X	X	X	X	

Full Door Faces/Doors



Drake pattern full door face



Arched Drake pattern
full door face



Arched Prairie pattern
full door face



'True Arch' Mission full door face



Mission design full door face



Rectangular Prairie pattern
full door face



Full screen face



Mission design doors

Controls



Standard wall mount or
Wireless wall mount thermostat



Wireless wall switch



Remote control



IPI full function
remote

Refractories



Brick refractory



Brick refractory
(standard in MTK & PRC only)



Black enamel panels



Shown w/Arched Prairie door face

Two Harbors...

Give small spaces big appeal with a *Two Harbors* fireplace from Kozy Heat. With the *Two Harbors*, design possibilities are limitless. Pair with cabinets, add shelves or wine racks for a unique look that satisfies your taste!

Two Harbors Specifications



Shown w/Arched Prairie
pattern door face -
Aspen cabinet & base

Model	Fuel Option	High	Low	Max Efficiency
Two Harbors	NG	14,600	10,700	75%
	LP	14,700	10,700	72%

Features:

- Canada P-4 approved
- IPI ignition system
- High quality lifetime warranty glass (21" H x 14" W)
- Quick-latch glass
- Accepts rigid pipe
- Patented log design
- Brick refractory
- MN Energy Code compliant to 50 pascals

Optional Features:

- Door designs (available in black, rust or titanium finish)
- Plated faces
- Fan kit with variable speed (1-75 CFM)
- Modular cabinet system


Specifications	
Height to top of standoff (w/o face)	32 1/2"
Front width (including standoffs/without face)	19 1/2"
Depth	14 3/8"
Back width	5 1/4"
Full door face width	21"
Full door face height	33 5/16"
Weight	76 lbs.

Safety

- Each unit factory tested!
- Tested by OMNI-Test Laboratories Complies with ANSI Z21.88a-2007•CSA 2.33a-2007 'Vented gas fireplace heaters'
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second delay pilot
- Requires NO ELECTRICITY to operate - excluding fan
- Automatic pressure relief glass system
- Bedroom and mobile home approved

Clearances	
From unit face top	1"
Unit bottom to flooring	0"
Unit side standoffs to adjacent side wall	1"
From unit left & right sides & back	1/2"
Unit base to ceiling	52"
Minimum enclosure height	47"
Mantel from top of upper grill opening to 12" mantel - 8"	
Refer to the mantel projection chart in the installation manual	

Framing Dimensions	
Height	32 5/8"
Width	19 3/4"
Depth	14 7/8"
Platform	19 3/4" W x 14 7/8" D

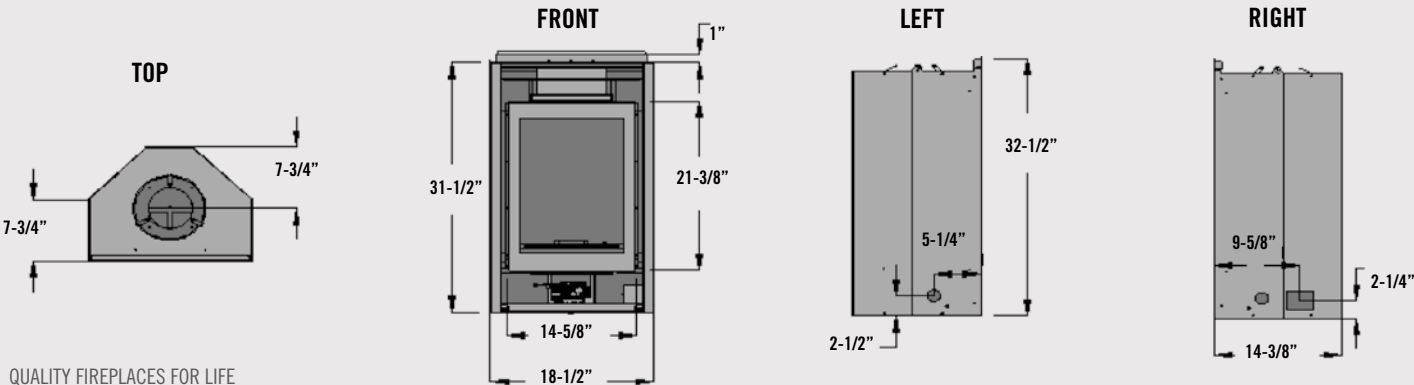



*Shown w/plated face
- Onyx w/brushed nickel -
Venice cabinet & base*



*Shown w/plated face copper
w/black - Meridian cabinet*

Aspen Style



Meridian Style



Venice Style




Two Harbors Options Accessories & Cabinetry Dimensions

Refractory




Brick refractory

Finishes



Rust



Titanium

Door Faces



Arched Prairie



Renaissance Pattern



Vineyard Pattern



Plated face - Brushed Nickel
w/black doors



Plated face -
Copper w/black



Plated face - Onyx
w/Brushed Nickel doors

Stain Samples

Oak Stain Samples



Golden Oak



Special Walnut



Espresso

Maple Stain Samples



Golden Oak



Special Walnut




Espresso

Simple White not shown.


Variations in color and shade are inherent in all printing processes, colors may vary slightly from those shown. Please visit your local dealer to view a sample board.

Available styles: Aspen, Meridian and Venice


Corner Cabinet




Corner top



Corner base




Wall base



Wall top

Flat Wall Cabinet

Hearths

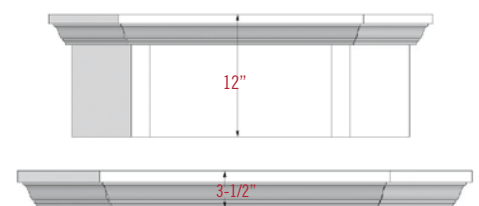

Hearth Width: 42 1/2" (Aspen/Meridian) • 44 1/8" (Venice)
Corner Hearth's Wall Depth = 28 7/8" (Aspen/Meridian)
29 3/4" (Venice) Also available in a 1" hearth

	Aspen/Meridian Wall Cabinets	Aspen/Meridian Corner Cabinets	Venice Wall Cabinets	Venice Corner Cabinets	Aspen/Meridian Wall Bases	Aspen/Meridian Corner Bases	Venice Wall Bases	Venice Corner Bases
A	42 1/2"	40 7/8"	44 1/8"	41 3/4"	42 1/2"	40 7/8"	44 1/8"	41 3/4"
B	18 5/8"	28 7/8"	19 1/2"	29 1/2"	18 5/8"	28 7/8"	19 1/2"	29 1/2"
C	36 5/8"	36 5/8"	36 5/8"	36 5/8"	36 5/8"	36 5/8"	36 5/8"	36 5/8"
D	47 3/4"	47 3/4"	47 3/4"	47 3/4"	36 3/4"	36 3/4"	36 3/4"	36 3/4"
E	15 5/8"	9 1/8"	15 5/8"	9 1/8"	15 5/8"	9 1/8"	15 5/8"	9 1/8"

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co. Inc.
204 Industrial Park Drive, Lakefield, MN 56150
Phone 1-800-253-4904 www.kozyheat.com

8-13



For complete information on the Kozy Heat product line, please contact us at: