





















Castleton

Tribute 18





Manchester









Clydesdale





















2 | HEARTHSTONE WOOD COLLECTION HEARTHSTONE WOOD COLLECTION | 3



# True Efficiency

The efficiency is found in our soft, enduring warmth. This long-lasting warmth is HeatLife – the ability to emanate a steady, radiant heat. Hearthstone HeatLife is superior. A Hearthstone generates a consistent heat that keeps your home warm longer.


The secret is in soapstone – soapstone naturally absorbs the heat of your fire, stores that heat, and then radiates it evenly throughout your home. We use soapstone so you enjoy soft, stable, and efficient heat - long after the fire is out.

We balance the natural heating qualities of soapstone with our clean-burning secondary combustion system. We use a passive, self-regulating system that ensures your Hearthstone burns as clean as possible, at whatever rate you're burning.

All Hearthstone wood and pellet stoves are EPA certified and are among the cleanest burning – if not the cleanest burning – biomass fuel models available.

No fuss. Little maintenance. With one lever, you control the burn rate. Your Hearthstone burns cleanly and effectively on any setting. Ultimately, you use less wood and enjoy a relaxing heat.

That's efficiency.

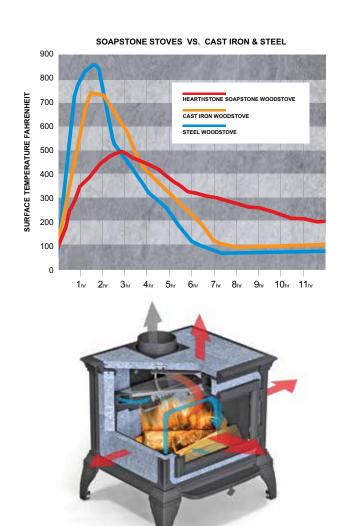







Every Hearthstone soapstone stove is signed by the stove builder

### Our Promise

For more than 35 years, dedicated Vermont craftsmen have been committed to building quality stoves. It's our commitment – our guarantee – that each Hearthstone is built with integrity in the Hearthstone tradition. Hearthstone continues to meet its promise of value, efficiency, and unmatched appeal. Your Hearthstone will serve you faithfully for years to come.

That's our promise.





# **EQUINOX**

### SOAPSTONE WOODSTOVE







Equinox featured in Matte Black with left side door.

# A POWERHOUSE TO HEAT THE MOST GENEROUS LIVING SPACES

Our largest soapstone stove, the Equinox possesses the strength to heat your entire home. Pack the generous firebox and enjoy an unmatched, long-lasting HeatLife – true of only a Hearthstone.

# Minimum Hearth Protection US/Canada: Thermal Protection: R-value 1.0 32½" 32½" From stone 16" / 18" From door opening From door opening From door opening From door opening From stone

### EQUINOX 8000 FEATURES AND BENEFITS

FINISH OPTIONS:


Painted Matte Black


- Right or left side load door flexible installation
- Oven-style side load door helps keep ashes in firebox
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 3,500 sq ft                    |
|-----------------------|--------------------------------|
| Firebox Capacity      | 4.0 cu ft                      |
| Size                  | Up to 120,000 BTUs             |
| EPA Certified         | 3.1 gph                        |
| Efficiency            | 82% LHV                        |
| Burn Time             | Up to 12 hours                 |
| HeatLife              | Up to 16 hours                 |
| Maximum Log Length    | 25" Left-Right, 20" Front-Back |
| Flue Exit & Diameter  | Top or Rear - 8"               |
| Ash Pan               | Included                       |
| Side Load Door        | Choose Left or Right           |
| Side Door Lock Kit    | Optional                       |
| Convection Blower     | Optional                       |
| Rear Heat Shield      | Optional                       |
| Outside Air Adapter   | Optional                       |
| Actual Weight         | 689 lbs.                       |
| Alcove Certified      | Yes                            |
| Mobile Home Certified |                                |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 21"                                      | 19″ *                                   |
| В | 21"                                      | 6"                                      |
| С | 26¾"                                     | 11¾″                                    |
| D | 15"                                      | 13½" *                                  |
| E | 303/8"                                   | 281/8" *                                |
|   |  |   |

<sup>\*</sup> Non-door side -or- locked side door

# **MANSFIELD**

### SOAPSTONE WOODSTOVE






Mansfield featured in Brown Majolica Enamel, shown with soapstone steamer (90-99112).

### Mansfield featured in Matte Black.

# **RELAXED GOOD LOOKS THAT DELIVER LASTING WHOLE-HOUSE WARMTH**

A true workhorse, the Mansfield is a top-seller among hearth professionals. Providing up to 14 hours of sustained heat on a single load of wood, the Mansfield delivers comfortable warmth throughout your home.

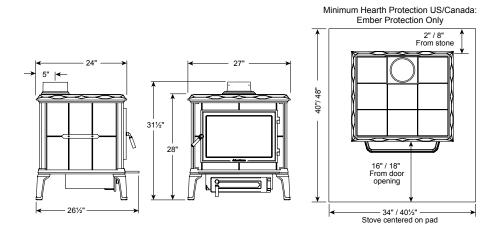

# FINISH OPTIONS:






### MANSFIELD 8012 **FEATURES AND BENEFITS**


- Deep firebox easy to load front-to-back, and side-
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 2,500 sq ft                   |
|-----------------------|-------------------------------|
| Firebox Capacity      | 3.2 cu ft                     |
| Size                  | Up to 80,000 BTUs             |
| EPA Certified         | 2.9 gph                       |
| Efficiency            | 77.4%                         |
| Burn Time             | Up to 10 hours                |
| HeatLife              | Up to 14 hours                |
| Maximum Log Length    | 21" Left-Right, 19" Front-Bac |
| Flue Exit & Diameter  | Top - 6"                      |
| Ash Pan               | Included                      |
| Convection Blower     | Optional                      |
| Rear Heat Shield      | Optional                      |
| Outside Air Adapter   | Included                      |
| Actual Weight         | 550 lbs.                      |
| Alcove Certified      | Yes                           |
| Mobile Home Certified | Yes                           |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 18"                                      | 18"                                     |
| В | 19"                                      | 8"                                      |
| С | 24"                                      | 13"                                     |
| D | 14"                                      | 14"                                     |
| Е | 27"                                      | 27"                                     |

# **PHOENIX**

### SOAPSTONE WOODSTOVE



FINISH OPTIONS:

Matte Black

Brown Majolica Enamel



Minimum Hearth Protection US/Canada: Thermal Protection: R-value 1.0

Phoenix featured with Brown Majolica Enamel finish.

### Phoenix featured in Matte Black and Polished Soapstone.

# QUICK HEAT OF CAST IRON RADIANT HEAT OF SOAPSTONE

Highlighting a hybrid design, the Phoenix combines the quick-heating qualities of a solid cast iron front and back with the radiant heat of natural soapstone for quick, lasting warmth. Compact, yet powerful, the Phoenix warms your midsize home for hours.

# 20" 19½" center of stovepipe 24½" center of stovepipe

Note: Shown with 45° elbow stovepipe, not included with stove


## PHOENIX 8612 FEATURES AND BENEFITS


- Cast iron and soapstone hybrid construction
   quick and lasting heat
- **45 degree flue collar –** flexible installation (freestanding or hearthmount stove)
- **Single lever stove control –** easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 2,000 sq ft               |
|-----------------------|---------------------------|
| Firebox Capacity      | 2.2 cu ft                 |
| Size                  | 60,000 BTUs               |
| EPA Certified         | 2.4 gph                   |
| Efficiency            | 75% LHV                   |
| Burn Time             | Up to 8 hours             |
| HeatLife              | Up to 12 hours            |
| Maximum Log Length    | 21"                       |
| Flue Exit & Diameter  | Reversible 45° collar - 6 |
| Ash Pan               | Included                  |
| Rear Heat Shield      | Optional                  |
| Outside Air Adapter   | Optional                  |
| Actual Weight         | 425 lbs.                  |
| Alcove Certified      | Yes                       |
| Mobile Home Certified | Yes                       |
|                       |                           |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear heat shield | Double-wall pipe, with rear heat shield |
|---|---------------------------------------|---|
| Α | 20"                                   | 16"                                     |
| В | 25"                                   | 13″                                     |
| С | 25½"                                  | 13½"                                    |
| D | 18"                                   | 12"                                     |
| Е | 271/4"                                | 21¼"                                    |

# **HERITAGE** SOAPSTONE WOODSTOVE













FINISH OPTIONS:

Seafoam Majolica Enamel

Black High-Gloss Enamel

Right side load - 8022R

### Heritage featured in Matte Black, shown with optional ash pan and rear heat shield.

# **OUR SIGNATURE PRODUCT** THE HERITAGE DELIVERS

Crafted in the tradition of Hearthstone innovation, the Heritage provides the enduring comfort of soapstone with side-loading capability and sustained heat for up to 12 hours. Our heirloom quality product will be the focal point of the room.

Shown with optional ash pan.

Minimum Hearth Protection US/Canada: Ember Protection Only 5½" / 8" From stone 16" / 18" From door opening


### HERITAGE 8022 **FEATURES AND BENEFITS**

- Left side load or right side load front door coordinated with side door for flexible installation
- Oven-style side load door helps keep ashes in
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Optional Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 1,900 sq ft      |
|-----------------------|------------------|
| Firebox Capacity      | 2.3 cu ft        |
| Size                  | Up to 55,000 BTU |
| EPA Certified         | 2.8 gph          |
| Efficiency            | 81% LHV          |
| Burn Time             | Up to 8 hours    |
| HeatLife              | Up to 12 hours   |
| Maximum Log Length    | 21"              |
| Flue Exit & Diameter  | Top or Rear - 6" |
| Ash Pan               | Optional         |
| Side Load Door        | Included         |
| Convection Blower     | Optional         |
| Rear Heat Shield      | Optional         |
| Outside Air Adapter   | Optional         |
| Actual Weight         | 475 lbs.         |
| Alcove Certified      | Yes              |
| Mobile Home Certified | Yes              |
|                       |                  |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS



|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 17"                                      | 15″ *                                   |
| В | 16"                                      | 7"                                      |
| С | 21"                                      | 12"                                     |
| D | 12"                                      | 11" *                                   |
| Е | 25½"                                     | 24½" *                                  |
|   |  |   |

<sup>\*</sup> Non-door side -or- locked side door

# **HOMESTEAD**

### SOAPSTONE WOODSTOVE




Freestanding Homestead featured with Brown Majolica Enamel finish.

# **OUR CLEANEST BURNING STOVE** FREESTANDING OR HEARTHMOUNT

Efficient and versatile, the Homestead keeps your midsize home cozy. One of the most efficient woodstoves on the market, the Homestead lends gentle radiant heat for lasting warmth you'll enjoy all day long.



# Hearth-Mount Thermal Protection: R-value 6.6 Oval-to-round flue adapter included Stove centered on pad

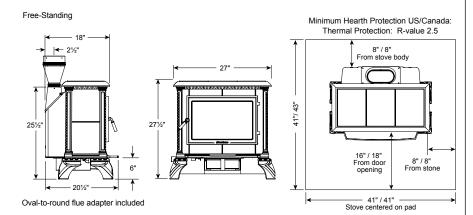

### FINISH OPTIONS:







(Free-Standing only)

Minimum Hearth Protection US/Canada:


### **HOMESTEAD 8570 FEATURES AND BENEFITS**

- Flexible installation available as freestanding or hearthmount stove
- Low flue exit uniquely designed as an 'outsert'
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan- easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 1,800 sq ft      |
|-----------------------|------------------|
| Firebox Capacity      | 2.0 cu ft        |
| Size                  | Up to 50,000 BTL |
| EPA Certified         | 1.9 gph          |
| Efficiency            | 83.5% LHV        |
| Burn Time             | Up to 8 hours    |
| HeatLife              | Up to 12 hours   |
| Maximum Log Length    | 21"              |
| Flue Exit & Diameter  | Top or Rear - 6" |
| Ash Pan               | Included         |
| Convection Blower     | Optional         |
| Rear Heat Shield      | Optional         |
| Outside Air Adapter   | Optional         |
| Hearth Surround       | Optional         |
| Actual Weight         | 380 lbs.         |
| Alcove Certified      | Yes              |
| Mobile Home Certified | Yes              |

### CLEARANCES TO COMBUSTIBLE MATERIALS




|   | Single-wall pipe, no rear heat shield |        | Double-wall pipe, with rear heat shield |        |
|---|---------------------------------------|--------|---|--------|
|   | H-M                                   | F-S    | H-M                                     | F-S    |
| Α | 23"                                   | 23"    | 16"                                     | 16"    |
| В | 26"                                   | 26"    | 7"                                      | 7"     |
| С | N/A                                   | 28½"   | N/A                                     | 9½"    |
| D | 18"                                   | 18"    | 12"                                     | 12"    |
| F | N/A                                   | 271/." | N/A                                     | 211/4" |

# **CASTLETON**

### SOAPSTONE WOODSTOVE












Castleton featured in Matte Black.



Castleton featured with Brown Majolica Enamel finish.

### CLASSIC STYLE WITH THE ESSENTIALS

The Castleton gives you the heating qualities of soapstone and the detailing of fine cast iron. Designed to maintain a warm, consistent heat, the Castleton is simple, reliable, affordable, and beautiful.



# Ember Protection Only — 31½" / 37½" -

Minimum Hearth Protection US/Canada:


### **CASTLETON 8030 FEATURES AND BENEFITS**


- Cast iron interior impact plates protect the soapstone when loading the stove
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

### **SPECIFICATIONS**

| Heats up to           | 1,500 sq ft       |
|-----------------------|-------------------|
| Firebox Capacity      | 1.9 cu ft         |
| Size                  | Up to 45,000 BTUs |
| EPA Certified         | 2.7 gph           |
| Efficiency            | 78% LHV           |
| Burn Time             | Up to 8 hours     |
| HeatLife              | Up to 10 hours    |
| Maximum Log Length    | 18"               |
| Flue Exit & Diameter  | Top or Rear - 6"  |
| Rear Heat Shield      | Optional          |
| Convection Blower     | Optional          |
| Outside Air Adapter   | Optional          |
| Actual Weight         | 464 lbs.          |
| Alcove Certified      | Yes               |
| Mobile Home Certified | Yes               |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 20"                                      | 15"                                     |
| В | 18"                                      | 6"                                      |
| С | 23"                                      | 11"                                     |
| D | 10"                                      | 10"                                     |
| Е | 23"                                      | 23"                                     |
|   |  |   |

# **TRIBUTE** SOAPSTONE WOODSTOVE









Tribute featured with Brown Majolica Enamel finish.

# BEAUTIFUL SOAPSTONE, SCALED TO WARM A MORE MODERATE SPACE

Perfect for a large room or a smaller home, the Tribute will burn for up to 5 hours – so you enjoy 7 hours of HeatLife. The Tribute delivers Hearthstone quality and efficiency at an attractive price point.





Minimum Hearth Protection US/Canada:

FINISH OPTIONS:


### TRIBUTE 8040 **FEATURES AND BENEFITS**


- Compact size adapts to smaller spaces
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

### **SPECIFICATIONS**

| SI LUII IUATIUNS      |                   |  |  |
|-----------------------|-------------------|--|--|
| Heats up to           | 1,000 sq ft       |  |  |
| Firebox Capacity      | 1.2 cu ft         |  |  |
| Size                  | Up to 36,000 BTUs |  |  |
| EPA Certified         | 3.0 gph           |  |  |
| Efficiency            | 80% LHV           |  |  |
| Burn Time             | Up to 5 hours     |  |  |
| HeatLife              | Up to 7 hours     |  |  |
| Maximum Log Length    | 16″               |  |  |
| Flue Exit & Diameter  | 6" top exit       |  |  |
| Convection Blower     | Optional          |  |  |
| Rear Heat Shield      | Optional          |  |  |
| Spark Screen          | Optional          |  |  |
| Outside Air Adapter   | Optional          |  |  |
| Actual Weight         | 318 lbs.          |  |  |
| Alcove Certified      | Yes               |  |  |
| Mobile Home Certified | Yes               |  |  |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 16½"                                     | 16½"                                    |
| В | 19"                                      | 8"                                      |
| С | 24"                                      | 13"                                     |
| D | 17"                                      | 7"                                      |
| Е | 28½"                                     | 18½"                                    |
|   |  |   |

# **MANCHESTER**

**CAST IRON WOODSTOVE** 



FINISH OPTIONS:

Matte Black

Brown Majolica Enamel

Decorative cast rear heat shield


Side load door



Manchester featured with Brown Majolica Enamel finish.

# FOR EFFICIENT, TOASTY WHOLE-HOME HEAT

Clean-burning, efficient, and versatile, the Manchester presents Hearthstone performance in cast iron style. Using a convection air system with an integrated cast iron heat exchanger, the Manchester provides extraordinary heating efficiency for your home. A soapstone-lined firebox captures and stores heat, so you enjoy a longer HeatLife.

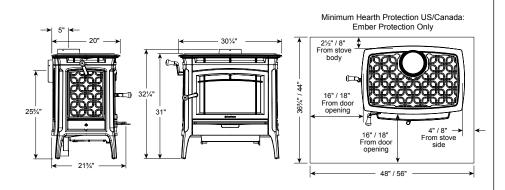


### MANCHESTER 8360 FEATURES AND BENEFITS

- Soapstone-lined interior extended HeatLife
- Right or left side door flexible installation
- Oven-style side door helps keep ashes in firebox
- Convection air channel with heat exchanger encourages airflow, moves heat throughout home
- **Decorative cast rear heat shield –** Finished look from any angle
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to                 | 2,400 sq ft          |
|-----------------------------|----------------------|
| Firebox Capacity            | 2.9 cu ft            |
| Size                        | Up to 78,000 BTUs    |
| EPA Certified               | 3.0 gph              |
| Efficiency                  | 80% LHV              |
| Burn Time                   | Up to 12 hours       |
| HeatLife                    | Up to 14 hours       |
| Maximum Log Length          | 24"                  |
| Flue Exit & Diameter        | Top or Rear - 6"     |
| Ash Pan                     | Included             |
| Convection Blower           | Optional             |
| Side Load Door              | Choose Left or Right |
| Rear Heat Shield            | Included             |
| Close Clearance Heat Shield | Optional             |
| Outside Air Adapter         | Optional             |
| Actual Weight               | 515 lbs.             |
| Alcove Certified            | Yes                  |
| Mobile Home Certified       | Yes                  |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS



|   | close-clearance heat shield | close-clearance heat shield |
|---|-----------------------------|-----------------------------|
| Α | 18"                         | 16" *                       |
| В | 16"                         | 6"                          |
| С | 21"                         | 11"                         |
| D | 9″                          | 9" *                        |
| E | 21¾"                        | 21¾" *                      |
|   |                             |                             |

\* Non-door side -or- locked side door

# **SHELBURNE**

**CAST IRON WOODSTOVE** 






Shelburne featured with Basil Majolica

### Shelburne featured in Matte Black

# THE TRADITIONAL BEAUTY OF **CAST IRON IN YOUR HOME**

A generous heating capacity allows the Shelburne to heat large areas of your home with ease. Traditional cast iron style is complemented by functionality: a soapstone-lined firebox extends the HeatLife; an oversized self-cleaning window makes loading easy and enhances your fire viewing. The Shelburne delivers Hearthstone quality in classic cast iron style.

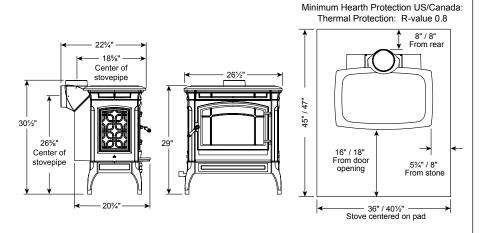

### FINISH OPTIONS:



Matte Black






### SHELBURNE 8371 **FEATURES AND BENEFITS**


- Soapstone-lined 2.0 cubic foot firebox extended HeatLife
- Reversible top or rear flue flexible installation (freestanding or hearthmount)
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 1,800 sq ft       |
|-----------------------|-------------------|
| Firebox Capacity      | 2.0 cu ft         |
| Size                  | Up to 60,000 BTUs |
| EPA Certified         | 2.1 gph           |
| Efficiency            | 80% LHV           |
| Burn Time             | Up to 8 hours     |
| HeatLife              | Up to 10 hours    |
| Maximum Log Length    | 20"               |
| Flue Exit & Diameter  | Top or Rear - 6"  |
| Ash Pan               | Included          |
| Convection Blower     | Optional          |
| Rear Heat Shield      | Optional          |
| Outside Air Adapter   | Optional          |
| Actual Weight         | 400 lbs.          |
| Alcove Certified      | Yes               |
| Mobile Home Certified | Yes               |
|                       |                   |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 18"                                      | 21"                                     |
| В | 24"                                      | 12"                                     |
| С | 27½"                                     | 15½"                                    |
| D | 13"                                      | 6"                                      |
| Е | 20"                                      | 13″                                     |
|   |  |   |

# **CRAFTSBURY**

### **CAST IRON WOODSTOVE**






Craftsbury featured with Brown Majolica Enamel finish.

# **CLASSIC AND COMPACT** WITH THE BENEFIT OF SOAPSTONE

Perfect for a large room or a smaller home, the Craftsbury heats with the classic good looks of embossed cast iron. Offering medium heating capacity and small dimensions, the Craftsbury is remarkably functional and adaptable.



# 51/4" / 8" From body of stove

Minimum Hearth Protection US/Canada:

### FINISH OPTIONS:





Brown Majolica Enamel




### **CRAFTSBURY 8391 FEATURES AND BENEFITS**


- Soapstone-lined 1.5 cubic foot firebox extended HeatLife
- Reversible top or rear flue flexible installation (freestanding or hearth-mount)
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 1,300 sq ft       |
|-----------------------|-------------------|
| Firebox Capacity      | 1.5 cu ft         |
| Size                  | Up to 40,000 BTUs |
| EPA Certified         | 3.8 gph           |
| Efficiency            | 81% LHV           |
| Burn Time             | Up to 6 hours     |
| HeatLife              | Up to 7 hours     |
| Maximum Log Length    | 17"               |
| Flue Diameter         | Top or Rear - 6"  |
| Ash Pan               | Included          |
| Convection Blower     | Optional          |
| Outside Air Adapter   | Optional          |
| Actual Weight         | 285 lbs.          |
| Alcove Certified      | Yes               |
| Mobile Home Certified | Yes               |
|                       |                   |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear<br>heat shield | Double-wall pipe, with rear heat shield |
|---|--|---|
| Α | 14"                                      | 14"                                     |
| В | 18"                                      | 6"                                      |
| С | 21"                                      | 9″                                      |
| D | 17"                                      | 10"                                     |
| Е | 22½"                                     | 15″                                     |
|   |  |   |

24 | HEARTHSTONE WOOD COLLECTION

Craftsbury featured with Basil Majolica Enamel finish.

# **CLYDESDALE**

**WOOD INSERT** 



Clydesdale featured in Brown Majolica Enamel finish.

# TRANSFORM YOUR FIREPLACE INTO A COMFORT SOLUTION

The Clydesdale is the perfect solution for drafty, inefficient fireplaces. The large open viewing area highlights the ambiance of wood burning while the cast iron and soapstone construction generates a heat output sufficient for large areas.



FINISH OPTIONS:







Clydesdale featured in Matte Black with

Minimum Hearth Protection:



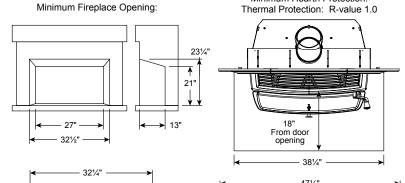

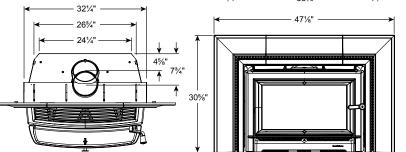


### **CLYDESDALE 8491** FEATURES AND BENEFITS


- Soapstone-lined firebox extended HeatLife
- Large front door easy loading and great view of the fire
- Cast iron firebox unequalled durability and maximum heat output
- Smooth firebox floor user friendly ash removal
- Telescoping design allows a flush or extended hearth
- Single lever stove control easy operation, consistent
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

### **SPECIFICATIONS**

| Heats up to          | .2,000 sq ft     |
|----------------------|------------------|
| Firebox Capacity     | .2.4 cu ft       |
| Size                 | .75,000 BTUs     |
| EPA Certified        | 3.2 gph          |
| Efficiency           | 79% (LHV)        |
| Burn Time            | .Up to 10 hours  |
| HeatLife             | .Up to 12 hours  |
| Maximum Log Length   | .22"-24"         |
| Flue Exit & Diameter | .6", 2 positions |
| Convection Blower    | Included         |
| Spark Screen         | .Optional        |
| Surround Extension   | .Optional        |
| Surround Base Caps   | .Optional        |
| Mantel Shield        | .Optional        |
| Actual Weight        | .550 lbs.        |
|                      |                  |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS





26 | HEARTHSTONE WOOD COLLECTION HEARTHSTONE WOOD COLLECTION | 27

# MORGAN WOOD INSERT







# EFFICIENT HEAT STRAIGHT FROM YOUR FIREPLACE

An attractive combination of design and function, the Morgan wood-fired insert can heat up to 1,200 square feet. The 1.7 cubic foot firebox is lined with thick soapstone panels that give the Morgan the thermal mass and HeatLife you expect from a Hearthstone.





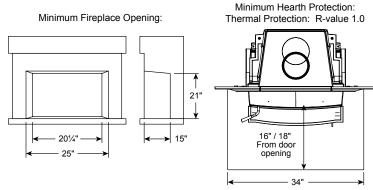

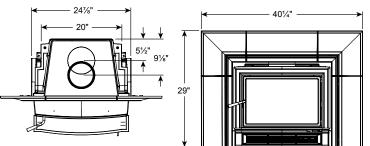

### FINISH OPTIONS:



Matte Black


### MORGAN 8470 FEATURES AND BENEFITS


- Soapstone-lined firebox extended HeatLife
- Large front door easy loading and great view of the fire
- Cast iron firebox unequalled durability and maximum heat output
- Smooth firebox floor user friendly ash removal
- Telescoping design allows a flush or extended hearth projection
- **Single lever stove control –** easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

### **SPECIFICATIONS**

| Heats up to        | 1,200 sq. ft.    |
|--------------------|------------------|
| Firebox Capacity   | 1.7 cu. ft.      |
| Size               | 40,000 BTUs      |
| EPA Certified      | 4.3 gph          |
| Efficiency         | 79% LHV          |
| Burn Time          | Up to 8 hours    |
| HeatLife           | Up to 10 hours   |
| Maximum Log Length | 18"              |
| Flue Exit          | 6" - 2 positions |
| Convection Blower  | Included         |
| Spark Screen       | Optional         |
| Surround Extension | Optional         |
| Surround Base Caps | Optional         |
| Mantel Shield      | Optional         |
| Actual Weight      | 349 lbs.         |
|                    |                  |

### CLEARANCES TO COMBUSTIBLE MATERIALS





# **MONTGOMERY**

### EPA CERTIFIED WOOD FIREPLACE FOR NEW CONSTRUCTION



Montgomery featured with Brown Majolica Enamel finish.

### THE PERFECT ADDITION TO YOUR HOME

Whether you are building or renovating, the Montgomery enhances your home and offers an efficient alternative to a traditional fireplace. The European cast iron front provides aesthetic appeal, while the latest fireplace technology makes the Montgomery a smart, clean, renewable energy choice.







### FINISH OPTIONS:



### WFP-75 8410 FEATURES AND BENEFITS


- EPA certified zero clearance fireplace clean burning, efficient
- · Stacked ledgestone interior panel accentuate the chiseled stone appearance of the cast iron front
- Optional vent ducting distribute heat to other
- · Thermostat controlled fans turn on and off automatically
- · Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

### **SPECIFICATIONS**

| Heats up to                    | 2,000 sq ft                |
|--------------------------------|----------------------------|
| Firebox Capacity               | 2.5 cu ft *                |
| Size                           | Up to 75,000 BTUs **       |
| EPA Certified                  | 4.4 gph                    |
| Efficiency                     | Up to 77%                  |
| Maximum Log Length             | 20"                        |
| Flue Exit & Diameter           | Top - 6" (7" Optional)     |
| Type of Chimney                | Refer to owner's manual    |
| Convection Blower              | Included                   |
| Spark Screen                   | Optional                   |
| Gravity Convection Air Kit     | Optional                   |
| Forced Air Convection Kit      | Optional                   |
| Actual Weight                  | 400 lbs.                   |
| * Maximum firehox canacity 1.7 | 7 cu ft behind the andiron |

<sup>\*</sup> Maximum firebox capacity, 1.7 cu ft behind the andiron \*\* BTU input value shown. Output: 8,000 to 40,000 BTUs

### **CLEARANCES** TO COMBUSTIBLE MATERIALS

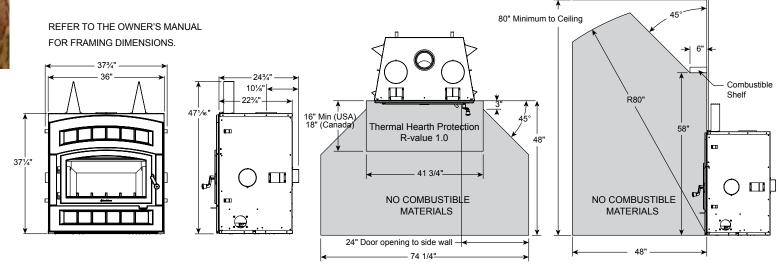

30 | HEARTHSTONE WOOD COLLECTION HEARTHSTONE WOOD COLLECTION | 31







FINISH OPTIONS:

Additional finish options are available by special order. Inquire with your dealer or visit www.hase.de



Grey Matte / Soapstone




Black / Lava Ceramic

Bari stove featured in

# FINE EUROPEAN DESIGN -AMAZING SPECTACLE OF FIRE

The striking cylindrical shape gives the Bari modern appeal. The soapstone construction provides radiant heat and sustained warmth. To maximize enjoyment, the Bari rotates 180 degrees and provides flame viewing from any spot in the room.

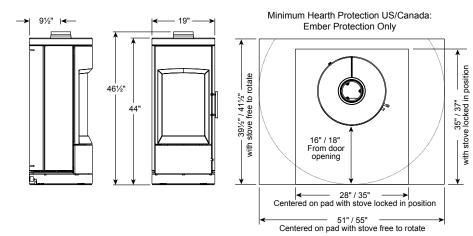


### **BARI 8170** FEATURES AND BENEFITS


- · Rotating design maximizes convenience view flames from around the room
- Soapstone or ceramic tiles store and radiate heat
- Multiple color options special order for personal-
- Generous firebox burn 17" logs vertically
- Double steel wall construction reduced clearances, encourages airflow, moves heat throughout home
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 1,400 sq ft       |
|-----------------------|-------------------|
| Firebox Capacity      | 1.5 cu ft         |
| Size                  | Up to 35,000 BTUs |
| EPA Certified         | 3.6 gph           |
| Efficiency            | 80% LHV           |
| Burn Time             | Up to 6 hours     |
| Maximum Log Length    | 17"               |
| Flue Exit & Diameter  | Top - 6"          |
| Ash Pan               | Included          |
| Rear Heat Shield      | Integral          |
| Outside Air Adaptor   | Optional          |
| Rotation              | 180°              |
| Actual Weight         | 475 lbs           |
| Alcove Certified      | Yes               |
| Mobile Home Certified | Yes               |
|                       |                   |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS





| Single-wall pipe |         | Double-wall pipe |  |
|------------------|---------|------------------|--|
| Α                | 38"     | 38"              |  |
| В                | 17" *   | 17″ *            |  |
| С                | 26½" *  | 26½" *           |  |
| D                | 12" **  | 12" **           |  |
| Е                | 21½" ** | 21½" **          |  |
|                  | -       | ·                |  |

<sup>\*</sup> Stove free to rotate, \*\* Stove locked in position

32 | HEARTHSTONE WOOD COLLECTION

Bari stove featured in Gray Matte with Soapstone. Stove pipe painted gray to match stove.







Lima stove featured in Black/Lava

# STYLE AND EFFICIENCY IN MODERN EUROPEAN DESIGN

The Lima combines style and utility to meet your needs. A ceramic construction delivers pleasing, radiant warmth. A curved glass window provides an amazing view of the fire. Rotate the Lima and extend the fire enjoyment throughout your space.





### FINISH OPTIONS:

Additional finish options are available by special order. Inquire with your dealer or visit www.hase.de






Titanium / Mojave Ceramic



Lima stove featured in Titanium/Mojave.

### Minimum Hearth Protection US/Canada: **Ember Protection Only**




### LIMA 8150 **FEATURES AND BENEFITS**


- Rotating design maximizes convenience view flames from around the room.
- Soapstone or ceramic tiles store and radiate heat
- Multiple color options special order for personalization
- Generous firebox burn 17" logs vertically
- Double steel wall construction reduced clearances, encourages airflow, moves heat throughout
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

### **SPECIFICATIONS**

| Heats up to           | 1,400 sq ft       |
|-----------------------|-------------------|
| Firebox Capacity      | 1.5 cu ft         |
| Size                  | Up to 35,000 BTUs |
| EPA Certified         | 3.6 gph           |
| Efficiency            | 80% LHV           |
| Burn Time             | Up to 6 hours     |
| Maximum Log Length    | 17"               |
| Flue Exit & Diameter  | Top - 6"          |
| Ash Pan               | Included          |
| Rear Heat Shield      | Integral          |
| Outside Air Adaptor   | Optional          |
| Rotation              | 180°              |
| Actual Weight         | 475 lbs           |
| Alcove Certified      | Yes               |
| Mobile Home Certified | Yes               |

### **CLEARANCES** TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe | Double-wall pipe |
|---|------------------|------------------|
| Α | 38"              | 38"              |
| В | 17" *            | 17" *            |
| С | 26½" *           | 26½" *           |
| D | 12" **           | 12" **           |
| E | 21½" **          | 21½" **          |

<sup>\*</sup> Stove free to rotate, \*\* Stove locked in position










Tula stove featured in Umbra.

Tula stove featured in Charcoal.

# THE PERFECT BALANCE OF FORM AND FUNCTION

Compact and easy-to-operate, the Tula easily fits into any living space and lifestyle. A unique glass frame offers a large viewing area. EPA-certified for its clean burn, the Tula produces a clean and efficient flame.

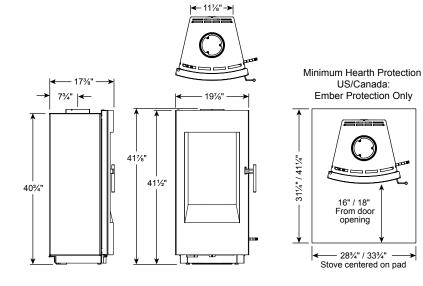


### **TULA 8190** FEATURES AND BENEFITS


- Ultra high efficiency of 88% reduces heating costs
- Generous firebox burn 17" logs vertically
- Double steel wall construction reduced clearances, encourages airflow, moves heat through-
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan- easy to clean, easily accessible

### **SPECIFICATIONS**

| 0. =007010            |                    |
|-----------------------|--------------------|
| Heats up to           | .1,400 sq ft       |
| Firebox Capacity      | .1.5 cu ft         |
| Size                  | .Up to 35,000 BTUs |
| EPA Certified         | .2.6 gph           |
| Efficiency            | .88% LHV           |
| Burn Time             | .Up to 6 hours     |
| Maximum Log Length    | .17"               |
| Flue Exit & Diameter  | .Top - 6"          |
| Ash Pan               | .Included          |
| Rear Heat Shield      | .Integral          |
| Outside Air Adaptor   | .Optional          |
| Actual Weight         | .291 lbs           |
| Alcove Certified      | .Yes               |
| Mobile Home Certified | .Yes               |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Single-wall pipe, no rear heat shield | Double-wall pipe, with rear heat shield |
|---|---------------------------------------|---|
| Α | 15"                                   | 15"                                     |
| В | 12"                                   | 7"                                      |
| С | 20½"                                  | 14½"                                    |
| D | 11"                                   | 11"                                     |
| E | 20½"                                  | 201⁄2"                                  |
|   |                                       |   |

# **MANCHESTER**

### PELLET STOVE





Manchester Pellet stove featured in Matte Black.

**Ember Protection Only** - 341/4" / 461/4"


Minimum Hearth Protection US/Canada:


FINISH OPTIONS:


Manchester Pellet stove featured in Brown Majolica Enamel.

# FINE-LINED EUROPEAN CAST IRON COMPLEMENTED BY PROVEN TECHNOLOGY

The Manchester Pellet brings you convenience and advanced technology in an attractive Hearthstone cast iron design. With a generous heat output and a low EPA emission rating of 1.3 gph, the Manchester is one of the most efficient and clean burning pellet stoves in the industry.








### **MANCHESTER PELLET 8330** FEATURES AND BENEFITS


- High-efficiency tube heat exchanger maximizes heat transfer to your home
- High-quality fans and few moving parts quiet
- Oval burn pot creates an unparalleled flame
- Finished firebox interior enhances the flame picture
- Automated control system self adjusts the combustion settings
- Automatic cleaning cycles minimize manual cleaning

### **SPECIFICATIONS**

| Heats up to           | . 2,000 sq ft             |
|-----------------------|---------------------------|
| Burn Rate Range       | . 1.8 to 6.0 lbs per hour |
| Size                  | . 15,300 to 51,000 BTUs   |
| EPA Rating            | . 1.3 gph                 |
| Efficiency            | . 87%                     |
| Hopper Capacity       | . Up to 60 lbs.           |
| Vent Size             | . 3" exit, 4" recommende  |
| Outside Air Inlet     | . 2 inch diameter         |
| EZ Comfort Control    | . Included                |
| Ash Pan               | . Included                |
| Convection Blower     | . Included                |
| Electrical Rating     | . 120 volts, 60Hz, 4Amps  |
| Actual Weight         | . 385 lbs                 |
| Alcove Certified      | . Yes                     |
| Mobile Home Certified | . Yes                     |
|                       |                           |

### CLEARANCES TO COMBUSTIBLE MATERIALS





|   | Horizontal Vent | Vertical Vent                   |
|---|-----------------|---------------------------------|
| Α | 6"              | 6"                              |
| В | 2"              | Determined by Vent Manufacturer |
| С | 1"              | Determined by Vent Manufacturer |

# **HERITAGE** PELLET STOVE




Heritage Pellet featured in Brown Majolica Enamel and Antique Kodiak Brown.

# THE ALLURE OF CAST IRON AND STONE IN A HIGH PERFORMANCE PELLET STOVE

The Heritage Pellet offers the convenience and sustainability of pellet burning with exceptional aesthetic appeal. High efficiency performance lowers fuel consumption, while high heat output enables the Heritage Pellet to heat up to 2,000 square feet.







Brown Majolica Enamel/ Antique Kodiak Brown or Sahara Sandstone



Matte Black / Soapstone







Enamel and Sahara Sandstone.


Heritage Pellet featured in Matte Black

Minimum Hearth Protection US/Canada: Ember Protection Only










### **HERITAGE PELLET 8091 FEATURES AND BENEFITS**

- High-efficiency tube heat exchanger maximizes heat transfer to your home
- High-quality fans and few moving parts quiet
- Oval burn pot creates an unparalleled flame
- Finished firebox interior enhances the flame picture
- Automated control system self adjusts the combustion settings
- Automatic cleaning cycles minimize manual cleaning

### **SPECIFICATIONS**

| Heats up to           | . 2,000 sq ft             |
|-----------------------|---------------------------|
| Burn Rate Range       | . 1.8 to 6.0 lbs per hour |
| Size                  | . 15,300 to 51,000 BTUs   |
| EPA Rating            | . 1.3 gph                 |
| Efficiency            | . 87%                     |
| Hopper Capacity       | . Up to 50 lbs.           |
| Vent Size             | . 3" exit, 4" recommended |
| Outside Air Inlet     | . 2 inch diameter         |
| EZ Comfort Control    | . Included                |
| Ash Pan               | . Included                |
| Convection Blower     | . Included                |
| Electrical Rating     | . 120 volts, 60Hz, 4Amps  |
| Actual Weight         | . 385 lbs                 |
| Alcove Certified      | . Yes                     |
| Mobile Home Certified | . Yes                     |

### CLEARANCES TO COMBUSTIBLE MATERIALS



|   | Horizontal Vent | Vertical Vent                   |
|---|-----------------|---------------------------------|
| Α | 6"              | 6"                              |
| В | 2"              | Determined by Vent Manufacturer |
| С | 1"              | Determined by Vent Manufacturer |

40 | HEARTHSTONE PELLET COLLECTION

# **DEVA** CAST IRON WOOD COOKSTOVE




# CLASSIC GOOD LOOKS, **CONTEMPORARY PERFORMANCE**

With classic style and radiant heat, the Hearthstone Deva does it all: cooks your food, warms your home, and enhances your kitchen. This wood-fired cookstove features a beautiful cast-iron-withnickel-trim construction and user-friendly controls. Handsome and well-crafted, the Deva evokes memories, nostalgia, and pleasure.











**FEATURES AND BENEFITS** 

**DEVA 8220** 

- Large window easy to monitor cooking
- Vitreoceramic cook top easy to clean, efficient heat transfer
- Oven temperature control simple operation, easy to control, consistent
- Centrally located thermometer easy visibility, precise temperature control
- Single lever stove control easy operation, consistent performance

# Minimum Hearth Protection US/Canada: Thermal Protection: R-value 0.9 opening Stove centered on pad






### **SPECIFICATIONS**

| Firebox Capacity     | 1.6 cu ft         |
|----------------------|-------------------|
| Size                 | Up to 46,000 BTUs |
| EPA Rating           | Exempt            |
| Maximum Log Length   | 17"               |
| Flue Exit & Diameter | Top or Rear - 6"  |
| Oven Capacity        | 2.5 cu ft         |
| Ash Pan              | Included          |
| Actual Weight        | 484 lbs           |
|                      |                   |

### CLEARANCES TO COMBUSTIBLE MATERIALS



|   | Single wall connector |     | Double wall connector |           |
|---|-----------------------|-----|-----------------------|-----------|
|   | Top Exit Rear Exit    |     | Top Exit              | Rear Exit |
| Α | 10" 4"                |     | 4"                    | 4"        |
| В | 10"                   | 4"  | 4"                    | 4"        |
| С | 16"                   | 16" | 14"                   | 16"       |
| D | 21½"                  | N/A | 19½"                  | N/A       |

42 | HEARTHSTONE WOOD COLLECTION HEARTHSTONE WOOD COLLECTION | 43

|  | EQUINOX          | MANSFIELD           | HERITAGE            | PHOENIX       | HOMESTEAD                        |
|--|------------------|---------------------|---------------------|---------------|----------------------------------|
| SPECIFICATIONS                           |                  |                     |                     | _             |                                  |
| Firebox capacity (1)                     | 4.0 cf           | 3.2 cf              | 2.3 cf              | 2.2 cf        | 2.0 cf                           |
| Maximum log length                       | 25"              | 21"                 | 21"                 | 21"           | 21"                              |
| Flue exit & diameter                     | top or rear – 8" | top – 6"            | top or rear – 6"    | 45° – 6"      | top or rear – 6"                 |
| Ash pan                                  | included         | included            | optional            | included      | included                         |
| Convection Blower                        | optional         | optional            | optional            | optional      | optional                         |
| Mobile-home certified                    | yes              | yes                 | yes                 | yes           | yes                              |
| Alcove certified (2)                     | yes              | yes                 | yes                 | yes           | yes                              |
| Actual weight (lbs)                      | 689              | 550                 | 475                 | 425           | 380                              |
| Shipping weight (lbs)                    | 774              | 575                 | 500                 | 470           | 440                              |
| PERFORMANCE                              |                  |                     |                     |               |                                  |
| Emissions                                | 3.1 gph          | 2.9 gph             | 2.8 gph             | 2.4 gph       | 1.9 gph                          |
| Heat output BTUs (3)                     | 120,000          | 80,000              | 55,000              | 60,000        | 50,000                           |
| Efficiency (4)                           | 82%              | 77.4%               | 81%                 | 75%           | 83.5%                            |
| Heating capacity up to (5)               | 3,500 sq. ft.    | 2,500 sq. ft        | 1,900 sq. ft.       | 2,000 sq. ft. | 1,800 sq. ft.                    |
| Burn time up to                          | 12 hours         | 10 hours            | 8 hours             | 8 hours       | 8 hours                          |
| HeatLife™ up to (6)                      | 16 hours         | 14 hours            | 12 hours            | 12 hours      | 12 hours                         |
| CLEARANCES (7)                           |                  |                     |                     |               |                                  |
| Side of stove                            | S 21" *          | 18"                 | 17" *               | 20"           | 23"                              |
| to side wall                             | D 19" *          | 18"                 | 15" *               | 16"           | 16"                              |
| Back of stove                            | S 21"            | 19"                 | 16"                 | 25"           | 26"                              |
| to back wall                             | D 6"             | 8"                  | 7"                  | 13"           | 7"                               |
| Corner of stove                          | S 15" *          | 14"                 | 12" *               | 18"           | 18"                              |
| to side wall                             | D 13½" *         | 14"                 | 11" *               | 12"           | 12"                              |
| Minimum hearthpad size US inches (9)     | 48" W x 41½" D   | 34" W x 40" D       | 47" W x 37 ½" D     | 42" W x 42" D | 41" W x 41" D                    |
| Minimum hearthpad size Canada inches (9) | 56" W x 48" D    | 40½" W x 48" D      | 52½" W x 42" D      | 42" W x 44" D | 41" W x 43" D                    |
| Minimum Hearth<br>Protection             | R-value 1.0      | Ember<br>Protection | Ember<br>Protection | R-value 1.0   | Hearthmount 6.6 Freestanding 2.9 |

| S | Single-wall pipe, no heat shield | D | Double-wall pipe, w/ rear heat shield |
|---|----------------------------------|---|---------------------------------------|

<sup>\*</sup> Applies to the side/corner opposite the side load door. If the side door lock kit is installed, side/corner clearance applies to both sides/rear corners.

|  |                                       |                     | 1                |                     |                  |                     |
|--|---------------------------------------|---------------------|------------------|---------------------|------------------|---------------------|
|  |                                       | CASTLETON           | TRIBUTE          | MANCHESTER          | SHELBURNE        | CRAFTSBURY          |
| SPECIFICATIONS                           |                                       |                     |                  |                     |                  |                     |
| Firebox capacity (1)                     |                                       | 1.9 cf              | 1.2 cf           | 2.9 cf              | 2.0 cf           | 1.5 cf              |
| Maximum log length                       |                                       | 18"                 | 16"              | 24"                 | 20"              | 17"                 |
| Flue exit & diameter                     | Flue exit & diameter top or rear – 6" |                     | top – 6"         | top or rear – 6"    | top or rear – 6" | top or rear – 6"    |
| Ash pan                                  |                                       | no                  | no               | included            | included         | included            |
| Convection Blower                        |                                       | optional            | optional         | optional            | optional         | optional            |
| Mobile-home certified                    |                                       | yes                 | yes              | yes                 | yes              | yes                 |
| Alcove certified (2)                     |                                       | yes                 | yes              | yes                 | yes              | yes                 |
| Actual weight (lbs)                      |                                       | 464                 | 318              | 515                 | 400              | 285                 |
| Shipping weight (lbs)                    |                                       | 500                 | 358              | 550                 | 425              | 315                 |
| PERFORMANCE                              |                                       |                     |                  |                     |                  |                     |
| Emissions                                |                                       | 2.7 gph             | 3.0 gph          | 3.0 gph             | 2.1 gph          | 3.8 gph             |
| Heat output BTUs (3)                     |                                       | 45,000              | 36,000           | 78,000              | 60,000           | 40,000              |
| Efficiency (4)                           |                                       | 78%                 | 80%              | 80%                 | 80%              | 81%                 |
| Heating capacity up to (5)               | city up to (5) 1,500 sq. ft.          |                     | 1,000 sq. ft.    | 2,400 sq. ft.       | 1,800 sq. ft.    | 1,300 sq. ft.       |
| Burn time up to                          | 8 hours                               |                     | 5 hours          | 12 hours            | 8 hours          | 6 hours             |
| HeatLife™ up to (6)                      |                                       | 10 hours            | 7 hours          | 14 hours            | 10 hours         | 7 hours             |
| CLEARANCES (7)                           |                                       |                     |                  |                     |                  |                     |
| Side of stove                            | s                                     | 20"                 | 16 ½"            | 18" *               | 18"              | 14"                 |
| to side wall                             | D                                     | 15"                 | 16 ½"            | 16" * (8)           | 21"              | 14"                 |
| Back of stove                            | S                                     | 18"                 | 19"              | 16"                 | 24"              | 18"                 |
| to back wall                             | D                                     | 6"                  | 8"               | 6" (8)              | 12"              | 6"                  |
| Corner of stove                          | S                                     | 10"                 | 17"              | 9" *                | 13"              | 17"                 |
| to side wall                             | D                                     | 10"                 | 7"               | 9" *                | 6"               | 10"                 |
| Minimum hearthpad size US inches (9)     |                                       | 1½" W x 36½" D      | 28%" W x 31%" D  | 48" W x 36¾" D      | 36" W x 45" D    | 38½" W x 41" D      |
| Minimum hearthpad size Canada inches (9) | 3                                     | 7½" W x 44½" D      | 38" W x 401/8" D | 56" W x 44" D       | 40½" W x 47" D   | 38½" W x 43" D      |
| Minimum Hearth Protection                |                                       | Ember<br>Protection | R-value 0.6      | Ember<br>Protection | R-value 0.8      | Ember<br>Protection |

Note: Always refer to the Hearthstone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your product.

44 | HEARTHSTONE | 45

 $<sup>{}^*\</sup> Applies\ to\ the\ side/corner\ opposite\ the\ side\ load\ door.\ If\ the\ side\ door\ lock\ kit\ is\ installed,\ side/corner\ clearance\ applies\ to\ both\ sides/rear\ corners.$ 



|  |     | BARI                | LIMA                | TULA                | MANCHESTER<br>PELLET | HERITAGE<br>PELLET  | DEVA                                       |
|--|-----|---------------------|---------------------|---------------------|----------------------|---------------------|--|
| SPECIFICATIONS                           |     |                     |                     |                     |                      |                     |  |
| Firebox capacity (1)                     |     | 1.5 cu. ft          | 1.5 cu. ft          | 1.5 cu. ft.         | Hopper– 60lbs        | Hopper– 50lbs       | 1.6 cu. ft                                 |
| Maximum log length                       | 17" |                     | 17"                 | 17"                 | N/A                  | N/A                 | 17"  |
| Flue exit & diameter                     |     | top – 6"            | top – 6"            | top - 6"            | rear – 3"            | rear – 3"           | top or rear – 6"                           |
| Ash pan                                  |     | included            | included            | included            | included             | included            | included                                   |
| Convection Blower                        | no  |                     | no                  | no                  | included             | included            | no   |
| Mobile-home certified                    |     | yes                 | yes                 | yes                 | yes                  | yes                 | no   |
| Alcove certified (2)                     |     | yes                 | yes                 | yes                 | yes                  | yes                 | no   |
| Actual weight (lbs)                      |     | 475                 | 475                 | 291                 | 385                  | 385                 | 484  |
| Shipping weight (lbs)                    |     | -                   | -                   | -                   | - 465                |                     | -  |
| PERFORMANCE                              |     |                     |                     |                     |                      |                     |  |
| Emissions                                |     | 3.6 gph             | 3.6 gph             | 2.6 gph             | 1.3 gph 1.3 gph      |                     | exempt                                     |
| Heat output BTUs (3)                     |     | 35,000              | 35,000              | 35,000              | 15,300 – 51,000      | 15,300 – 51,000     | 46,000                                     |
| Efficiency (4)                           |     | 80%                 | 80%                 | 88%                 | 87%                  | 87%                 | -  |
| Heating capacity up to (5)               |     | 1,400 sq. ft.       | 1,400 sq. ft.       | 1,400 sq. ft.       | 2,000 sq. ft.        | 2,000 sq. ft.       | -  |
| Burn time up to                          |     | 6 hours             | 6 hours             | 6 hours             | 1.8 – 6.0 lbs/hr     | 1.8 - 6.0 lbs/hr    | -  |
| HeatLife™ up to (6)                      |     | hr (soapstone only) | N/A                 | N/A                 | N/A                  | N/A                 | N/A  |
| CLEARANCES (7)                           |     |                     |                     |                     |                      |                     |  |
| Side of stove                            | S   | 38"                 | 38"                 | 15"                 | 6"                   | 6"                  | 10"  |
| to side wall                             | D   | 38"                 | 38"                 | 15"                 | N/A                  | N/A                 | 4"   |
| Back of stove                            | S   | 17" *               | 17" *               | 12"                 | 2"                   | 2"                  | 16"  |
| to back wall                             | D   | 17" *               | 17" *               | 7"                  | N/A                  | N/A                 | 14"  |
| Corner of stove                          | S   | 12" **              | 12" **              | 11"                 | 1"                   | 1"                  | -  |
| to side wall                             | D   | 12" **              | 12" **              | 11"                 | N/A                  | N/A                 | -  |
| Minimum hearthpad size US inches (9)     |     | " W x 39½" D        | 51" W x 39 ½" D     | 28¾"W x 31¼"D       | 341/4"W x 323/8"D    | 31" W x 31" D       | 56" W x 39 <sup>3</sup> / <sub>4</sub> " D |
| Minimum hearthpad size Canada inches (9) |     | 5" W x 41½" D       | 55" W x 41 ½" D     | 33¾"W x 41¼"D       | 461/4"W x 443/8"D    | 43" W x 43" D       | 56" W x 41¾" D                             |
| Minimum Hearth Protection                |     | Ember<br>Protection | Ember<br>Protection | Ember<br>Protection | Ember<br>Protection  | Ember<br>Protection | R-value 0.9                                |

|  | CLYDESDALE              | MORGAN                | MONTGOMERY    |
|--|-------------------------|-----------------------|---------------|
| SPECIFICATIONS                           |                         |                       |               |
| Firebox capacity (1)                     | 2.4 cu. ft.             | 1.7 cu. ft.           | 1.7 cu. ft    |
| Maximum log length                       | 22"-24"                 | 18"                   | 20"           |
| Flue exit & diameter                     | top – 6"                | top – 6"              | top - 6"      |
| Ash pan                                  | no                      | no                    | no            |
| Convection Blower                        | included                | included              | included      |
| Mobile-home certified                    | no                      | no                    | no            |
| Alcove certified (2)                     | no                      | no                    | no            |
| Actual weight (lbs)                      | 550                     | 349                   | 400           |
| Shipping weight (lbs)                    | 585                     | 416                   | -             |
| PERFORMANCE                              |                         |                       |               |
| Emissions                                | 3.2 gph                 | 4.3 gph               | 4.4 gph       |
| Heat output BTUs (3)                     | 75,000                  | 40,000                | 40,000        |
| Efficiency (4)                           | 79%                     | 79%                   | 77%***        |
| Heating capacity up to (5)               | 2,000 sq. ft.           | 1,200 sq. ft.         | 1,600 sq. ft. |
| Burn time up to                          | 10 hours                | 8 hours               | 6 hours       |
| HeatLife™ up to (6)                      | 12 hours                | 10 hours              | N/A           |
| CLEARANCES (7)                           |                         |                       |               |
| Door opening to side wall                | 12"                     | 13"                   | 24"           |
| Mantel height                            | 50"                     | 55"                   | 58"           |
| Mantel height w/ shield                  | 34"                     | 43"                   | N/A           |
| Minimum fireplace opening                | 23¼"H x<br>32½"W x 13"D | 21"H x 25"W<br>x 15"D | N/A           |
| Minimum hearthpad size US inches (9)     | 381/4" W x 18" D        | 34" W x 16" D         | 41¾ W x 16" D |
| Minimum hearthpad size Canada inches (9) | 38¼" W x 18" D          | 34" W x 18" D         | 41¾ W x 18" D |
| Minimum Hearth<br>Protection             | R-value 1.0             | R-value 1.0           | R-value 1.0   |

\*\*\* Optimal efficiency. not from LHV test data

| <b>_</b>                   |                              |
|----------------------------|------------------------------|
| Back of stove to back wall | Corner of stove to side wall |
| <b>1</b>                   |                              |
| Side of stove to side wall |                              |


- (1) The amount and weight of wood contained per cubic foot of firebox volume can vary from 15 to 36 lbs. per cubic foot depending on type of wood, moisture content, packing density, and other factors. As a constant for comparison and test purposes, we are assuming 20 lbs. of seasoned hardwood per cubic foot of firebox volume.
- (2) See Owner's Manual for specific alcove clearances and alcove hearthpad requirements.
- (3) Heat output will vary depending on frequency of loading, the dryness and quality of wood used, packing density, and other installation variables.
- (4) Efficiency measured at lower heating value (LHV).
- (5) Heating capacity is an approximation dependent upon type of wood, loading configuration, floor plan, ceiling height, house construction, venting configuration, heat loss, geographic location of home, and other usage and regional variables.
- (6) HeatLife™ is a trademark of Hearthstone Quality Home Heating Products and is defined as the quantity of heat stored within the thermal mass of the stove. Used here, it refers not just to burn time but to total hours of usable heat from a single load of fuel.
- (7) Clearances on this page are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.
- (8) The Manchester rear heat shield is built in: there is an optional Close Clearance heatshield which may further reduce rear clearances to 6".
- (9) See Owner's Manual for specific hearth material and R-value requirements.

Note: Always refer to the Hearthstone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your product.

Warranty: Hearthstone warrants all its wood and pellet products to the original purchaser for the lifetime of the appliance to be free from defects in material and workmanship, with certain limitations as defined in our Limited Lifetime Warranty policy. See your Hearthstone dealer for complete details and a copy of our warranty policy.

S Single-wall pipe, no heat shield D Double-wall pipe, w/ rear heat shield \*Stove free to rotate, \*\* Stove locked in position

46 | HEARTHSTONE

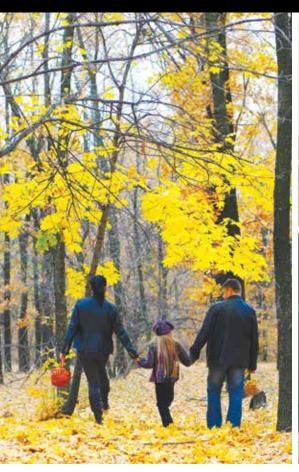









www.hearthstonestoves.com 802.888.5235





Hearthstone Quality Home Heating Products 317 Stafford Avenue Morrisville Vermont 05661 USA



S000000479438