



WAITSFIELD DX

GAS STOVE



PANORAMIC THREE-SIDED VIEWING PLUS EFFICIENT PERFORMANCE

The Waitsfield DX embraces innovation and efficiency in a world class gas stove. Panoramic 3-sided viewing allows you to enjoy the warmth and ambiance throughout the room. Control your comfort level with a wide-ranging adjustable heat output and integrated convection blower, all from the convenience of the remote control.



FINISH OPTIONS:




Matte Black



Brown Majolica Enamel



Basil Majolica Enamel

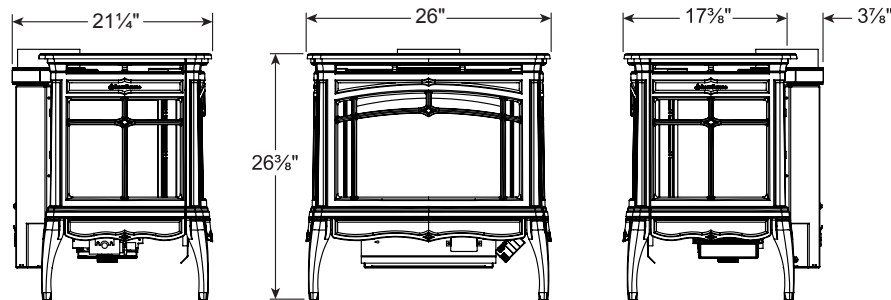

CLEARANCES

Rear.....2" (51mm)

Side16" (407mm)

Corner11" (280mm)

Floor Protection: Non-combustible surface or wood floor

Refer to Owner's Manual for exact specifications prior to installation.

WAITSFIELD DX 8770 FEATURES AND BENEFITS

- **3-sided viewing**
 - Provides warmth and ambiance throughout the room
- **Reflective glass interior**
 - Magnifies the glow and depth of the fire
- **Child-safe certified glass barriers**
 - Ensures safety within your home
- **Smart remote control offers**
 - Flame adjustment
 - Blower speed adjustment
 - Thermostatic mode
 - Programmable timer
- **Cast iron heat exchanger**
 - Maximizes heat output and efficiency
- **Integrated 110 CFM convection blower**
 - Circulates warm air quietly
- **Ceramic logs and burner**
 - Simulates a realistic wood fire
- **2-Stage burner**
 - Offers a wide range of heat output
- **Efficient on-demand pilot**
 - Conserves energy in warm weather
 - Provides reliability in cold weather
- **Secure battery power**
 - Operates the stove during a power outage*
 - *Requires 110V for blower
- **Direct-Vent technology**
 - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
 - Delivers reliable zone heating

SPECIFICATIONS

Heats up to.....	1,800 sq ft
Steady State Efficiency	77.4%
Canadian Fireplace Efficiency (EnerGuide P.4) ..	70.0%
Burn Rate Range NG.....	18,000-37,000 BTUs/hr
Burn Rate Range LP.....	16,000-37,000 BTUs/hr
Venting	Top, 4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Burner.....	2-Stage Ceramic Burner
Convection Blower	Included
Smart Remote Control	Included
Safety Barrier Screens.....	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Weight	200 lbs.

CHAMPLAIN

GAS STOVE



A PERFECT ZONE HEATING SOLUTION

The Champlain direct-vent gas stove delivers extraordinary heating power. A cast iron heat exchange system increases warm radiant and convective airflow. The included remote control and optional convection blower allow you to maintain your desired comfort level.



FINISH OPTIONS:



Matte Black




Brown Majolica Enamel



CHAMPLAIN 8302 FEATURES AND BENEFITS

- **Child-safe certified glass barriers**
 - Ensures safety within your home
- **Cast iron heat exchanger**
 - Maximizes heat output and efficiency
- **Smart remote control offers**
 - Flame adjustment
 - Thermostatic mode
 - Programmable timer
- **Ceramic logs**
 - Simulates a realistic wood fire
- **Efficient on-demand pilot**
 - Conserves energy in warm weather
 - Provides reliability in cold weather
- **Optional 150 CFM convection blower**
 - Circulates warm air quietly
 - Temperature activated on/off
 - Manual rheostat control
- **Secure battery power**
 - Operates the stove during a power outage*
 - *Requires 110V for optional blower
- **Direct-Vent technology**
 - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
 - Delivers reliable zone heating

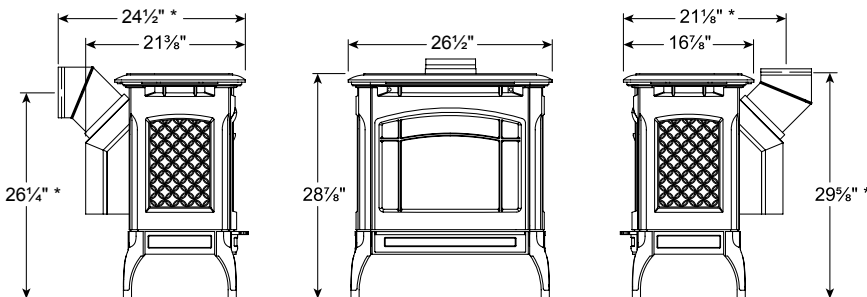

*Shown with 45° elbow venting. Dimensions may vary depending on venting manufacturer.

CLEARANCES

Rear.....3" (77mm)
Side2" (51mm)
Side, snorkel termination4" (102mm)
Floor Protection: Non-combustible surface or wood floor

Refer to Owner's Manual for exact specifications prior to installation.

SPECIFICATIONS

Heats up to.....1,800 sq ft
Steady State Efficiency.....74.6%
Canadian Fireplace Efficiency (EnerGuide P.4) ..67.9%
Burn Rate Range NG.....21,000-35,000 BTUs/hr
Burn Rate Range LP.....22,000-35,000 BTUs/hr
Venting45°, 4" x 6-5/8" DV
Ignition System.....Maxitrol GV60
Burner.....Pan Burner
Convection Blower.....Optional
Smart Remote Control.....Included
Safety Barrier Screens.....Included
LP Conversion Kit.....Included
Mobile Home Certified.....Yes
Weight.....220 lbs.

STOWE

GAS STOVE



A BEAUTIFUL ROOM HEATER

Our Stowe gas stove strikes a harmonious balance between size and heat output. Its proportions and flexible venting options allow the Stowe to fit perfectly into distinctive spaces. The Stowe provides cozy ambiance with efficient on-demand fire.



FINISH OPTIONS:



Matte Black



Brown Majolica Enamel



Oyster Enamel




STOWE 8323

FEATURES AND BENEFITS

- **Child-safe certified glass barriers**
 - Ensures safety within your home
- **Cast iron refractory**
 - Features a traditional brick pattern
- **Cast iron heat exchanger**
 - Maximizes heat output and efficiency
- **Smart remote control offers**
 - Flame adjustment
 - Thermostatic mode
 - Programmable timer
- **Ceramic logs and burner**
 - Simulates a realistic wood fire
- **Efficient on-demand pilot**
 - Conserves energy in warm weather
 - Offers reliability in cold weather
- **Optional 150 CFM convection blower**
 - Circulates warm air quietly
 - Temperature activated on/off
 - Manual rheostat control
- **Secure battery power**
 - Operates the stove during a power outage*
 - *Requires 110V for optional blower
- **Direct-Vent technology**
 - Draws combustion air from outside to reduce drafts and maintain indoor air quality
- **Heater Rated Appliance (ANSI Z21.88)**
 - Delivers reliable zone heating

SPECIFICATIONS

Heats up to.....	1,200 sq ft
Steady State Efficiency.....	80.1%
Canadian Fireplace Efficiency (EnerGuide P.4) ..	75.7%
Burn Rate Range NG.....	13,000-22,400 BTUs/hr
Burn Rate Range LP.....	14,000-22,400 BTUs/hr
Venting	45°, 4" x 6-5/8" DV
Ignition System.....	Maxitrol GV60
Burner.....	Ceramic Burner
Convection Blower	Optional
Smart Remote Control	Included
Safety Barrier Screens.....	Included
LP Conversion Kit	Included
Mobile Home Certified	Yes
Weight.....	155 lbs.

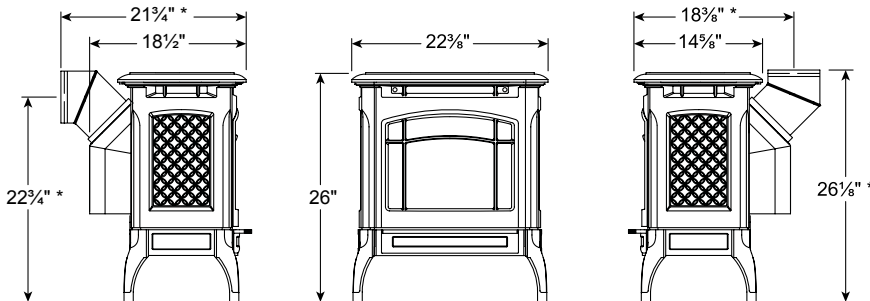

*Shown with 45° elbow venting. Dimensions may vary depending on venting manufacturer.

CLEARANCES

Rear.....	3" (77mm)
Side	4" (102mm)*
	*6" with side walls deeper than 18"
Corner	4" (102mm)

Floor Protection: Non-combustible surface or wood floor

Refer to Owner's Manual for exact specifications prior to installation.



Hearthstone Gas Products

Quality, Comfort & Convenience



Quality:

Hearthstone stoves are constructed using fine-lined European cast iron. The quality of our iron is displayed in the intricate details of each stove and the overall craftsmanship of the finished product.

Our gas fires are awe-inspiring, boasting sculpted ceramic logs and a warm, flickering glow.

Protective screens, integrated into each stove, create a low profile appearance that nearly disappears when the fire is burning.

Comfort:

In addition to large viewing areas, all Hearthstone gas stoves incorporate a cast iron heat exchanger, pulling heat out of the firebox and increasing the warm convective air flow.

As an on-demand heat source, Hearthstone stoves are the perfect zone heating solutions delivering the heat you want, when and where you want it.

Convenience:

All of Hearthstone's gas products are remote control operated. Turn the stove on and off, adjust the heat output, or program the stove to fit your lifestyle. Our on-demand pilot system saves you money by turning off the pilot after an extended period of inactivity.



www.hearthstonestoves.com
Hearthstone Quality Home Heating Products, Inc.
317 Stafford Avenue, Morrisville Vermont 05661 USA

